


PREPRINT  
NOT FOR REVIEW

**ma  
the  
ma  
tisch**

**cen  
trum**

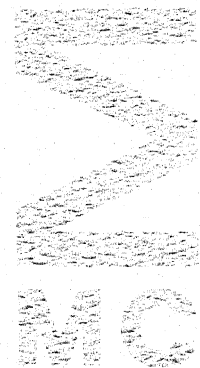

---

AFDELING NUMERIEKE WISKUNDE  
(DEPARTMENT OF NUMERICAL MATHEMATICS)

NW 117/81

DECEMBER

P.W. HEMKER

AN ACCURATE METHOD WITHOUT DIRECTIONAL BIAS FOR THE  
NUMERICAL SOLUTION OF A 2-D ELLIPTIC SINGULAR  
PERTURBATION PROBLEM

Preprint

---

**amsterdam**

**1981**

**stichting  
mathematisch  
centrum**



---

AFDELING NUMERIEKE WISKUNDE  
(DEPARTMENT OF NUMERICAL MATHEMATICS)

NW 117/81

DECEMBER

P.W. HEMKER

AN ACCURATE METHOD WITHOUT DIRECTIONAL BIAS FOR THE  
NUMERICAL SOLUTION OF A 2-D ELLIPTIC SINGULAR  
PERTURBATION PROBLEM

Preprint

---

**kruislaan 413 1098 SJ amsterdam**

*Printed at the Mathematical Centre, 413 Kruislaan, Amsterdam.*

*The Mathematical Centre, founded the 11-th of February 1946, is a non-profit institution aiming at the promotion of pure mathematics and its applications. It is sponsored by the Netherlands Government through the Netherlands Organization for the Advancement of Pure Research (Z.W.O.).*

An accurate method without directional bias for the numerical solution of a 2-D elliptic singular perturbation problem \*)

by

P.W. Hemker

#### ABSTRACT

We describe a numerical method for the solution of a 2-D elliptic singular perturbation problem. The method makes use of the Defect Correction Principle. One defect correction step uses both an accurate instable and an inaccurate stable discretization of the continuous problem (FEM-discretization and artificial diffusion). A second defect correction step is a relaxation or smoothing step. In the combined process both steps iteratively alternate.

The iteration can easily be incorporated in an iterative algorithm for the solution of the discretized system (e.g. a multiple grid method).

Without a directional bias in the discretizations and without particular mesh refinements, the resulting method is *asymptotically* stable. It is  $O(h^2)$  accurate for smooth components in the solution and the numerical boundary layer thickness is  $O(h)$ . Therefore, the method is suited for locating the boundary layer and for subsequent application of adaptive mesh-refinements.

KEY WORDS & PHRASES: *Stiff PDE, defect correction*

---

\*) This report will be submitted for publication elsewhere.

## 1. INTRODUCTION

We study problems related with the numerical solution of the singular perturbation equation

$$(1.1) \quad L_\epsilon u \equiv -\epsilon \Delta u + \vec{a} \cdot \nabla u = f,$$

in a two-dimensional region  $\Omega$ . This equation can be considered as a model equation for more complex real-life problems such as flows described by the Navier-Stokes equation. We refer to equation (1.1) as the convection-diffusion equation;  $\vec{a}$  is the convection vector and  $\epsilon > 0$  is the diffusion parameter, which may be small compared to  $|\vec{a}|$ .

Although we study equation (1.1) with constant coefficients, we want to find numerical methods that are applicable for variable  $\vec{a}$ ; i.e.  $\vec{a} = \vec{a}(x,y)$  or  $\vec{a} = \vec{a}(x,y,u)$ . In particular, we are interested in methods that are independent of the direction of  $\vec{a}$  and independent of whether the grid is properly refined in possible boundary layers, when  $\epsilon$  is small. Therefore, we study methods that do not make use of a-priori knowledge about the solution, the convection direction or proper mesh refinements.

As a simplification of the 2-D equation we also study the 1-D case. For this 1-D problem,

$$(1.2) \quad L_\epsilon u \equiv +\epsilon u_{xx} + 2u_x = f,$$

many numerical methods have already been investigated (see e.g. contributions in Hemker-Miller [1979] or Axelsson-Frank-Van Der Sluis [1981]). However, almost none of these methods are suitable for generalization in more dimensions.

An essential difficulty in the numerical solution of (1.1) with  $0 < \epsilon < h$ ,  $h$  the mesh-width, is the different type of approximation that is required in the smooth part of the solution and in the boundary or interior layers. In the smooth part an accurate approximation - possibly of high order - is desirable, whereas for the boundary layer the proper location is of prime importance, with the additional requirement that the effect of the (almost) discontinuity does not disturb the solution in the smooth parts. Large derivatives of the solution inside the layers make that in these layers high order approximation is of no use. Therefore, we are interested in methods that are of low order for unsmooth and of higher order for smooth components in the solution. When these methods are applied, local error estimates may be used for generating adaptive mesh-refinements afterwards.

The problems induced by the small parameter

For large values of  $\varepsilon$  the numerical solution of (1.1) gives no particular problems. Discretizations

$$(1.3) \quad L_{h,\varepsilon} u_{h,\varepsilon} = f_h$$

are known for which  $\|u_{h,\varepsilon} - u_\varepsilon\| = O(h^2)$  as  $h \rightarrow 0$ , e.g. the usual central difference or finite element discretizations. The errorbound remains valid for small values of  $\varepsilon$ :

$$\|u_{h,\varepsilon} - u_\varepsilon\| \leq C_\varepsilon h^2 \quad \text{as } h \leq h_\varepsilon,$$

but  $C_\varepsilon \rightarrow \infty$  and  $h_\varepsilon \rightarrow 0$  as  $\varepsilon \rightarrow 0$ . This means that the error estimate is of no use if we apply these discretizations with finite  $h$  and  $\varepsilon \rightarrow 0$ . In fact, for small  $\varepsilon$ , the usual discretizations may yield quite useless approximations.

EXAMPLE

Discretizing the 1-D model problem

$$(1.4) \quad \begin{aligned} \varepsilon u_{xx} + 2u_x &= 0, & x \in [0, \infty), \\ u(0) &= 1, & u(\infty) = 0, \end{aligned}$$

by central differencing:

$$(1.5) \quad \varepsilon \Delta_+ \Delta_- u_h + (\Delta_+ + \Delta_-)u_h = 0,$$

we find

$$u_{h,\varepsilon}(jh) = \left(\frac{\varepsilon-h}{\varepsilon+h}\right)^j.$$

This is a second order approximation indeed:

for  $jh$  fixed and  $\left(\frac{h}{\varepsilon}\right) \rightarrow 0$

$$|u_{h,\varepsilon}(jh) - u_\varepsilon(jh)| = \left| \left(\frac{\varepsilon-h}{\varepsilon+h}\right)^j - (e^{-2h/\varepsilon})^j \right| \leq C \left(\frac{h}{\varepsilon}\right)^2,$$

$C$  independent of  $j$ ,  $h$  and  $\varepsilon$ .

However, the solution of the reduced difference equation is

$$(1.6) \quad u_{h,0}(jh) = \lim_{\varepsilon \rightarrow 0} u_{h,\varepsilon}(jh) = (-1)^j.$$

The influence of the boundary condition at  $x = 0$  is significant over the whole domain of definition, whereas for the reduced differential equation the influence of this boundary condition vanishes in the interior of the domain.

A well-known cure against this spurious influence of the boundary condition is "upwinding" or "artificial diffusion". In upwinding one-sided differences are used for the discretization of the first order term. In artificial diffusion, the diffusion constant  $\varepsilon$  is replaced by a larger value  $\alpha = \varepsilon + O(h)$ . In both cases the spurious influence disappears at the expense of the fact that these discretizations are only accurate of order  $O(h)$ . In the 1-D case "upwinding" is equivalent with "artificial diffusion" with  $\alpha = \varepsilon + h|a|/2$ .

EXAMPLE

The solution of the upwind discretization of (1.4)

$$(1.7) \quad \epsilon \Delta_+ \Delta_- u_h + 2\Delta_+ u_h = 0$$

is

$$u_{h,\epsilon}(jh) = \left(\frac{\epsilon}{\epsilon+2h}\right)^j.$$

In contrast with the central difference solution, we see that here the influence of the boundary condition vanishes in the interior of the domain as  $\epsilon \rightarrow 0$ ; but this discretization is only first order:

for  $jh$  fixed and  $(\frac{h}{\epsilon}) \rightarrow 0$  we find

$$|u_{h,\epsilon}(jh) - u_\epsilon(jh)| \leq C\left(\frac{h}{\epsilon}\right).$$

## 2. LOCAL MODE ANALYSIS

We want to analyze separately the behaviour of the discretizations (i) in the smooth parts of the solution, and (ii) in the boundary layers. For this we use the local mode analysis (LMA), cf. Brandt [1980] and Brandt and Dinar [1979]. We consider equation (1.1) in two particular model problems:

(i) the inhomogeneous problem

$$(2.1) \quad L_{h,\epsilon} u_h = f_h$$

on a regular rectangular discretization of  $\mathbb{R}^2$ ;  $u_h$  and  $f_h$  are bounded at infinity, and

(ii) the homogeneous problem

$$(2.2) \quad L_{h,\epsilon} u_h = 0$$

in a discretization of the half-space, of which the boundary is a grid-line; boundary conditions are given on this grid-line and  $u_h$  is bounded at infinity.

In both cases we consider the discretization of the constant coefficient problem on a regular rectangular grid and we decompose the solution in its Fourier modes (see e.g. Hemker [1980])

$$(2.3) \quad u_h(jh) = \left(\frac{1}{\sqrt{2\pi}}\right)^2 \int \hat{u}_h(\omega) e^{+i\omega h j} d\omega, \quad j \in \mathbb{Z}^2,$$

where  $u_{h,\omega} = \hat{u}_h(\omega) e^{i\omega h j}$  is the mode of frequency  $\omega$  in  $u_h$ ; the amplitude of this mode with

$$\omega \in \mathbb{T}_h^2 = \{\omega \mid \omega \in \mathbb{C}^2, \operatorname{Re} \omega_k \in [-\pi/h, \pi/h), k = 1, 2\}$$

is given by

$$(2.4) \quad \hat{u}_h(\omega) = \left(\frac{h}{\sqrt{2\pi}}\right)^2 \sum_j e^{-i\omega h j} u_h(jh).$$

If we consider the problem (2.1), the boundary condition imposes  $\omega \in \mathbb{R}^2$ ; for (2.2) with  $\Omega$  being the right half-space, with boundary conditions at  $x = 0$ , we have

$\text{Im } \omega_1 > 0, \text{Im } \omega_2 = 0$ . In this paper we restrict the analysis to the model problem (2.1).

The modes being the eigenfunction of the discrete operator  $L_h$ , we can define the *characteristic form*  $\widehat{L}_h(\omega)$  corresponding with the discrete operator  $L_h$ , by

$$(2.5) \quad \widehat{L}_h u_{h,\omega} = \widehat{L}_h(\omega) \widehat{u}_{h,\omega}.$$

This characteristic form  $\widehat{L}_h(\omega)$  is the analogue of the *characteristic polynomial* or the *symbol*  $\widehat{L}(\omega)$  of the continuous operators  $L$ .

We now define consistency and stability of the operator  $L_h$  for each mode  $\omega$  separately.

DEFINITION. The operator  $L_h$  is *consistent* with  $L$  of order  $p$  for mode  $\omega \in T_h^2$  if

$$(2.6) \quad |\widehat{L}_h(\omega) - \widehat{L}(\omega)| \leq C h^p \text{ for } h \rightarrow 0.$$

DEFINITION. The *stability* of  $L_h$  for mode  $\omega \in T_h^2$  is the quantity  $|\widehat{L}_h(\omega)|$ .

DEFINITION. The *numerical (interior) stability* of  $L_h$ , a discretization of  $L$ , for  $\omega \in T_h^2 \cap \mathbb{R}^2$  is

$$(2.7) \quad |\widehat{L}_h(\omega)| / |\widehat{L}(\omega)|.$$

DEFINITION. The operator  $L_h$  is *numerical (interior) stable* if

$$(2.8) \quad \forall \rho > 0 \quad \exists \eta > 0 \quad \forall \omega \in T_h^2 \cap \mathbb{R}^2 \quad |\widehat{L}(\omega)| > \rho \rightarrow |\widehat{L}_h(\omega)| / |\widehat{L}(\omega)| > \eta,$$

where  $\eta = \eta(\rho)$  is independent of  $h$ .

DEFINITION. The operator  $L_{h,\varepsilon}$ , a discretization of  $L_\varepsilon$  is *asymptotically stable* if

$$\forall \rho > 0 \quad \exists \eta > 0 \quad \forall \omega \in T_h^2 \cap \mathbb{R}^2 \quad \lim_{\varepsilon \rightarrow 0} |\widehat{L}_\varepsilon(\omega)| > \rho \rightarrow \lim_{\varepsilon \rightarrow 0} \frac{|\widehat{L}_{h,\varepsilon}(\omega)|}{|\widehat{L}_\varepsilon(\omega)|} > \eta.$$

DEFINITION. The operator  $L_{h,\varepsilon}$  is  $\varepsilon$ -*uniformly stable* if (2.8) holds with  $\eta = \eta(\rho)$  independent of  $h$  and  $\varepsilon$ .

#### EXAMPLE

To study the local behaviour of the discretization (1.5) of our 1-D model problem we find its characteristic form

$$(2.9) \quad \widehat{L}_{h,\varepsilon}(\omega) = \frac{\sin(\omega h/2)}{h/2} \left( -\varepsilon \frac{\sin(\omega h/2)}{h/2} + 2i \cos(\omega h/2) \right).$$

Comparing this with the symbol  $\widehat{L}_\varepsilon(\omega) = -\varepsilon \omega^2 + 2i\omega$  of  $L$  we find

(1) the discretization (1.5) is consistent of order 2:

$$|\widehat{L}_{h,\varepsilon}(\omega) - \widehat{L}_\varepsilon(\omega)| \leq C h^2 |\varepsilon \omega^4 + i\omega^3| + O(h^3);$$

(2) the discretization (1.5) is asymptotically unstable:

$$\lim_{\varepsilon \rightarrow 0} \widehat{L}_{h,\varepsilon}(\pi/h) = 0, \quad \text{whereas}$$

$$\lim_{\varepsilon \rightarrow 0} \widehat{L}_\varepsilon(\pi/h) = 2\pi i/h.$$



We find that  $u_{h,\pi/h}$  is an unstable mode. This mode corresponds to

$$u_h(jh) = e^{i\pi j} = (-1)^j,$$

cf. eq. (1.6).

If we consider the discretization with artificial diffusion  $\alpha$ , we find its characteristic form (2.9) with  $\epsilon$  replaced by  $\alpha > 0$ . This discretization is

(1) consistent of order 1 if  $|\alpha - \epsilon| \leq C_1 h$ ; viz.

$$(2.10) \quad \begin{aligned} |\hat{L}_{h,\alpha}(\omega) - \hat{L}_\epsilon(\omega)| &\leq C_1 |\alpha - \epsilon| |\omega|^2 + |\hat{L}_{h,\epsilon}(\omega) - \hat{L}_\epsilon(\omega)| \\ &\leq O(|\alpha - \epsilon|) + O(h^2) = O(h), \end{aligned}$$

(2) numerical (interior) stable, uniform in  $\epsilon$ , if  $|\alpha - \epsilon| \geq C_2 h$ ; viz.

$$\begin{aligned} \left| \frac{\hat{L}_{h,\alpha}(\omega)}{\hat{L}_\epsilon(\omega)} \right| &= \left| \frac{\sin(\omega h/2)}{\omega h/2} \right| \left| \frac{\frac{2\alpha}{h} \sin(\omega h/2) - 2i \cos(\omega h/2)}{\epsilon \omega - 2i} \right| \\ &\geq \frac{2}{\pi} \cdot \frac{2}{\pi} \left| \frac{\frac{\alpha}{h} \sin(\omega h/2) - i \cos(\omega h/2)}{\frac{\epsilon}{h} \sin(\omega h/2) - i} \right| \\ &\geq \frac{4}{\pi^2} \cdot \frac{1}{\sqrt{2}} \min(\alpha/h, i) \geq \frac{2\sqrt{2}}{\pi^2} \min(C_2, 1). \end{aligned}$$

There are no spurious unstable modes.

### 3. THE DEFECT CORRECTION PRINCIPLE

For the solution of linear problems, the defect correction principle is a general technique to approximately solve a problem

$$(3.1) \quad Lu = f$$

by means of an iteration process

$$(3.2) \quad \tilde{L} u^{(i+1)} = \tilde{L} u^{(i)} - L u^{(i)} + f, \quad i = 1, 2, \dots$$

The operator  $\tilde{L}$ , an approximation to  $L$ , is selected such that problems

$$\tilde{L} u^{(i+1)} = \tilde{f},$$

with  $\tilde{f}$  in a neighbourhood of  $f$ , are easy to solve. If  $\tilde{L}$  is injective and the iteration process (3.2) converges to a fixed point  $\tilde{u}$ , then  $\tilde{u}$  is clearly a solution of (3.1). The convergence of the iterands to the solution of (3.1) is described by the error amplification operator

$$I - \tilde{L}^{-1} L;$$

the reduction of the residual  $r^{(i)} = f - L u^{(i)}$  in each step is described by the residual amplification operator

$$I - L \tilde{L}^{-1}.$$

If two equations  $\tilde{L}_h u_h = f_h$  and  $L_h u_h = f_h$  are both discretizations of a problem  $Lu = f$  (respectively consistent of order  $p$  and  $q$ ,  $p \leq q$ ) and if  $\tilde{L}_h$  satisfies the stability condition

$$(3.3) \quad \|\tilde{L}_h^{-1}\| < C, \quad \text{uniform in } h,$$

then it is well known (cf. e.g. Hackbusch [1979], Hemker [1981a]) that in the iterative process

$$(3.4.a) \quad \begin{cases} \tilde{L}_h u_h^{(1)} = f_h, \\ \tilde{L}_h u_h^{(i+1)} = \tilde{L}_h u_h^{(i)} - L_h u_h^{(i)} + f_h, \end{cases}$$

$$(3.4.b) \quad \tilde{L}_h u_h^{(i+1)} = \tilde{L}_h u_h^{(i)} - L_h u_h^{(i)} + f_h,$$

$u_h^{(i)}$  satisfies

$$\|u_h^{(i)} - u\| = O(h^{\min(q, ip)}).$$

This error bound holds without a stability condition (3.3) for the accurate operator  $L_h$ .

Direct application of the defect correction principle to the solution of our singular perturbation problem suggest the application of (3.4) with  $L_h = L_{h,\epsilon}$  with the 2nd order central difference (or FEM) discretization and with  $\tilde{L}_h = L_{h,\alpha}$ , the artificial diffusion discretization. Then, the correction equation (3.4.b) has the simple form

$$(3.5) \quad L_{h,\alpha} u_h^{(i+1)} = f_h + (\alpha - \epsilon)\Delta_h u_h^{(i)}.$$

Since  $L_{h,\alpha}$  is stable and consistent of order 1 and  $L_{h,\epsilon}$  is consistent of order 2, we obtain

$$(3.6) \quad \begin{aligned} \|u_h^{(1)} - u\| &= O(h) & \text{and} \\ \|u_h^{(i)} - u\| &= O(h^2) & \text{for } i > 1. \end{aligned}$$

Where  $\Delta_h u_h^{(i)}$  is a good approximation to  $\Delta u$ , (i.e. outside the boundary layer)  $u_h^{(i+1)}$  is a better approximation to  $u$  than  $u_h^{(1)}$ . The error bounds (3.6), however, hold in the classical sense: for fixed  $\epsilon$  and  $h \rightarrow 0$ . For a general  $i > 1$ , the solution  $u_h^{(i)}$  is not better than the central difference approximation, but in the first few iterands the instability of  $L_{h,\epsilon}$  has only a limited influence.

#### EXAMPLE

For (1.4) we can compute the solutions in the defect correction process explicitly. Application of (3.4) with the operators  $L_h$  and  $\tilde{L}_h$  as given in (3.5) yields the solutions


$$\begin{aligned} u_h^{(1)}(jh) &= \left(\frac{\epsilon}{\epsilon+2h}\right)^j, \\ u_h^{(2)}(jh) &= \left(\frac{\epsilon}{\epsilon+2h}\right)^j \left[1 - \frac{jh}{2} \cdot \frac{2h}{(\epsilon+2h)}\right], \\ &\vdots \\ &\vdots \\ &\vdots \end{aligned}$$

$$u_h^{(m+1)}(jh) = \left(\frac{\epsilon}{\epsilon+2h}\right)^j P_m(j, h/\epsilon),$$

where  $P_m(j, h/\epsilon)$  is an  $m$ -th degree polynomial in  $j$  depending on the parameter  $h/\epsilon$ . It is easily verified that, for  $\epsilon$  fixed and  $h \rightarrow 0$ , the solutions are 2nd order accurate for  $m = 1, 2, \dots$ . For small values of  $\epsilon/h$ ,  $P_m(j, h/\epsilon)$  changes sign  $m$  times for  $j = 0, 1, 2, \dots, m+1$ ; i.e. in each iteration step of (3.4) one more oscillation appears in the numerical solution. The influence of the boundary condition at  $x = 0$  vanishes in the interior after the first  $m+1$  nodal points. By each step of (3.4) the effect of the instability of  $L_{h, \epsilon}$  creeps over one meshpoint further into the numerical solution. Similar effects are found for the process in two dimensions

Figure 1

The numerical solutions  $u_h^{(i)}$  of equation (1.4) for small values of  $\epsilon/h$

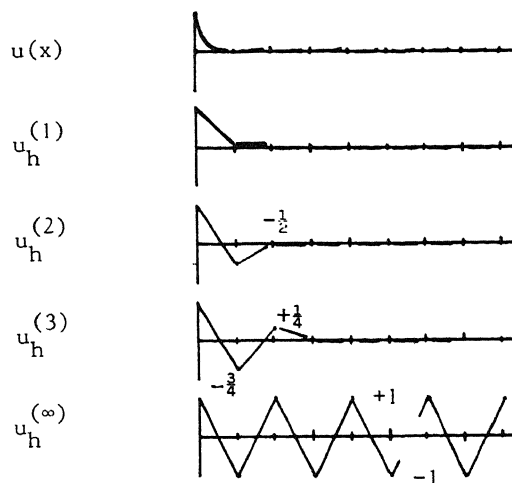

#### 4. A MIXED DEFECT CORRECTION PROCESS

In this section we develop an iterative method of which the stationary solution is asymptotically stable and 2nd order accurate in the smooth parts of the solution. We consider the "mixed defect correction process" (MDCP):

$$(4.1.a) \quad \begin{cases} \tilde{L}_h^1 u_h^{(i+\frac{1}{2})} = \tilde{L}_h^1 u_h^{(i)} - L_h^1 u_h^{(i)} + f_h, \\ \tilde{L}_h^2 u_h^{(i+1)} = \tilde{L}_h^2 u_h^{(i+\frac{1}{2})} - L_h^2 u_h^{(i+\frac{1}{2})} + f_h. \end{cases}$$

For this process the following theorem holds.

**THEOREM.** Let both  $\tilde{L}_h^1$  and  $\tilde{L}_h^2$  satisfy the stability condition (3.3) and let  $L_h^k u_h = f_h$  and  $\tilde{L}_h^k u_h = f_h$  be discretizations of order  $p_k$  and  $q_k \leq p_k$  respectively,  $k = 1, 2$ . If for (4.1) a stationary solution

$$u_h^A = \lim_{i \rightarrow \infty} u_h^{(i)}$$

exists, then

$$(4.2) \quad \|u - u_h^A\| \leq C h^{\min(p_1+q_2, p_2)}.$$

**PROOF.** See Hemker [1981b] p. 79-81.

For the singular perturbation problem (1.1) we take

$$(4.3) \quad \begin{aligned} & \text{a) } L_h^1 = L_{h,\epsilon} \text{ the central difference (or FEM) discrete operator,} \\ & \text{b) } L_h^2 = \tilde{L}_h^1 = L_{h,\alpha} \text{ the artificial diffusion discrete operator, and} \\ & \text{c) } \tilde{L}_h^2 = 2 \cdot \text{diag}(L_{h,\alpha}). \end{aligned}$$

Thus, a pair of iteration steps consists of

- 1) a defect correction step as in section 3, and
- 2) a damped Jacobi relaxation step for the solution of the stable discretized system.

If the iteration (4.1) converges, it has not a single fixed point, but it has two stationary solutions  $u_h^A = \lim_{i \rightarrow \infty} u_h^{(i)}$  and  $u_h^B = \lim_{i \rightarrow \infty} u_h^{(i+\frac{1}{2})}$ . For our choice of operators, the above theorem yields, for a fixed  $\epsilon$ , the error bounds

$$(4.4) \quad \begin{aligned} \|u_\epsilon - u_{h,\epsilon}^A\| &\leq C_\epsilon h \quad \text{and} \\ \|u_\epsilon - u_{h,\epsilon}^B\| &\leq C_\epsilon h^2, \end{aligned}$$

where  $u_\epsilon$  is the exact solution. The defect correction step (4.1.a) generates a 2nd order accurate solution and may introduce high-frequency unstable components. The damped Jacobi relaxation step (4.1.b) is able to reduce the high-frequency errors. Hence we expect that the combined process is not only accurate but also stable. First we demonstrate this for our 1-D problem. In the next section we give the analysis for the 2-D problem.

The stationary solutions  $u_h^A$  and  $u_h^B$  in (4.1) - (4.3) can be characterized as solutions of linear systems

$$(4.5) \quad [L_h^1 + L_h^2 (\tilde{L}_h^2)^{-1} (L_h^2 - L_h^1)] u_h^A = f_h,$$

and

$$(4.6) \quad [L_h^1 + (L_h^2 - L_h^1) (\tilde{L}_h^2)^{-1} L_h^2] u_h^B = [I + (L_h^2 - L_h^1) (\tilde{L}_h^2)^{-1}] f_h,$$

with  $L_h^1$ ,  $L_h^2$  and  $\tilde{L}_h^2$  as in (4.3).

For a brief notation we denote eq. (4.5) as

$$M_{h,\epsilon} u_h^A = f_h.$$

#### Local mode analysis of the MDCP applied to the 1-D model problem

The characteristic forms of the different discretizations of the 1-D model problem

$$(4.7) \quad L_\epsilon u \equiv \epsilon u'' + 2u' = f$$

are, for central differencing ( $L_{h,\epsilon}$ ), upwinding ( $L_{h,\alpha}$  with  $\alpha = \epsilon + h$ ) and the MDCP discretization  $M_{h,\epsilon}$  respectively

$$(4.8) \quad \hat{L}_{h,\epsilon}(\omega) = -\frac{4\epsilon}{h^2} S^2 + \frac{4i}{h} SC,$$

$$(4.9) \quad \widehat{L}_{h,\alpha}(\omega) = -\frac{4\varepsilon}{h^2} S^2 \left[1 + \frac{h}{\varepsilon}\right] + \frac{4i}{h} SC,$$

$$(4.10) \quad \widehat{M}_{h,\varepsilon}(\omega) = -\frac{4\varepsilon}{h^2} S^2 \left[1 + \frac{h}{\varepsilon} S^2\right] + \frac{4i}{h} SC \left[1 + \frac{h}{\varepsilon+h} S^2\right],$$

where  $S = \sin(\omega h/2)$  and  $C = \cos(\omega h/2)$ .

**THEOREM.** *The operator  $M_{h,\varepsilon}$  defined by the MDCP process (4.1)-(4.3) applied to the model equation (4.7) is consistent of 2nd order and  $\varepsilon$ -uniformly stable.*

**PROOF.** Comparing  $\widehat{M}_{h,\varepsilon}$  with  $\widehat{L}_\varepsilon(\omega)$  we find for all  $\omega \in T_h^2 \cap \mathbb{R}^2$

$$\begin{aligned} |\widehat{M}_{h,\varepsilon}(\omega) - \widehat{L}_\varepsilon(\omega)| &\leq |\widehat{M}_{h,\varepsilon}(\omega) - \widehat{L}_{h,\varepsilon}(\omega)| + |\widehat{L}_{h,\varepsilon}(\omega) - \widehat{L}_\varepsilon(\omega)| \\ &= O(h^2) \quad \text{for } h \rightarrow 0 \end{aligned}$$

i.e.  $M_{h,\varepsilon}$  is consistent of the 2nd order.

For the stability we find

$$\left| \frac{\widehat{M}_{h,\varepsilon}(\omega)}{\widehat{L}_\varepsilon(\omega)} \right| = \frac{4|S|}{|h\omega|} \cdot \frac{|\left(\frac{\varepsilon}{h}S + S^3\right) + iC\left(1 + \frac{h}{\varepsilon+h}S^2\right)|}{|\varepsilon\omega + 2i|}.$$

For  $0 < h \leq \varepsilon$  we find for all  $\omega \in T_h^2 \cap \mathbb{R}^2$

$$\frac{|\widehat{M}|}{|\widehat{L}|} \geq \frac{4}{\pi} \cdot \frac{|\frac{\varepsilon}{h}S + iC|}{|\varepsilon S \frac{\pi}{h} + 2i|} \geq \frac{4}{\pi^2} \frac{1}{\sqrt{2}}.$$

For  $0 \leq \varepsilon \leq h$

$$\frac{|\widehat{M}|}{|\widehat{L}|} \geq \frac{4}{\pi} \frac{|S^3 + iC(1 + \frac{1}{2}S^2)|}{|\varepsilon S \frac{\pi}{h} + 2i|} \geq \frac{2}{\pi\sqrt{\pi^2 + 4}}.$$

Thus we find, uniform in  $\varepsilon$  and  $h$ ,

$$\inf_{\omega \in T_h^2 \cap \mathbb{R}^2} \frac{|\widehat{M}_{h,\varepsilon}(\omega)|}{|\widehat{L}_\varepsilon(\omega)|} \geq \frac{\sqrt{2}}{\pi^2}.$$

This inequality implies  $\varepsilon$ -uniform stability.  $\square$

## 5. LOCAL MODE ANALYSIS APPLIED TO THE 2-D MODEL PROBLEM

An analysis, analogous to the 1-D case, can be made for the 2-D model equation

$$(5.1) \quad L_\varepsilon u \equiv \varepsilon \Delta u + (4 + 2p) \vec{a} \cdot \nabla u = f.$$

The corresponding difference operator is given by

$$(5.2) \quad L_{h,\varepsilon} \equiv \frac{\varepsilon}{h^2} \begin{bmatrix} & & & & \\ & 1 & & & \\ & & -4 & & \\ & & & 1 & \\ & & & & 1 \end{bmatrix} + \frac{a_1}{h} \begin{bmatrix} & -p & +p \\ -2 & 0 & 2 \\ & -p & +p \end{bmatrix} + \frac{a_2}{h} \begin{bmatrix} & & & 2 & p \\ & & & p & 0 & -p \\ & & & -p & -2 \end{bmatrix}.$$

With  $p = 0$  it corresponds to the central difference discretization; with  $p = 1$  it

describes the FEM discretization on a regular triangulation with piecewise linear trial- and test-functions. Also for the 2-D equation we define the MDCP by (4.1) - (4.3). The 2nd order consistency of the corresponding  $M_{h,\epsilon}$  and its asymptotic stability are proved similarly to the 1-D case.

**THEOREM.** *The operator  $M_{h,\epsilon}$ , defined by the process (4.1) - (4.3), applied to the model equation (1.1) with central difference or finite element discretization for  $L_{h,\epsilon}$  and with artificial diffusion,  $\alpha = \epsilon + C_1 h$ , is consistent of 2nd order and asymptotically stable.*

**PROOF.** Similar to the 1-D case we find

$$\begin{aligned}\widehat{L}_{h,\epsilon}(\omega) &= -\frac{4\epsilon}{h^2} S^2 + \frac{4i}{h} T \quad \text{and} \\ \widehat{M}_{h,\epsilon}(\omega) &= -\frac{4\epsilon}{h^2} S^2 \left[1 + \frac{\alpha-\epsilon}{2\epsilon} S^2\right] + \frac{4i}{h} T \left[1 + \frac{\alpha-\epsilon}{2\alpha} S^2\right],\end{aligned}$$

where

$$\begin{aligned}T &= a_1 S_\phi (2C_\phi + pC_{\phi+2\phi}) + a_2 S_\theta (2C_\theta + pC_{\theta+2\phi}), \\ S &= S_\phi^2 + S_\theta^2, \quad S_\phi = \sin(\phi), \quad C_\phi = \cos(\phi) \\ \phi &= \omega_1 h/2, \quad \theta = \omega_2 h/2.\end{aligned}$$

Further  $\widehat{L}_\epsilon(\omega) = \frac{-4\epsilon}{h^2} (\phi^2 + \theta^2) + \frac{2i}{h} (2+p)(a_1\phi + a_2\theta)$ . Now it is easy to show that

$$|\widehat{M}_{h,\epsilon}(\omega) - \widehat{L}_\epsilon(\omega)| \leq |\widehat{M}_{h,\epsilon}(\omega) - \widehat{L}_{h,\epsilon}(\omega)| + |\widehat{L}_{h,\epsilon}(\omega) - \widehat{L}_\epsilon(\omega)| = O(h^2)$$

which proves the consistency.

To prove the asymptotic stability we find

$$\lim_{\epsilon \rightarrow 0} \frac{|\widehat{M}_{h,\epsilon}(\omega)|}{|\widehat{L}_\epsilon(\omega)|} = \left| \frac{i \frac{\alpha}{h} S^4 + [2 + S^2]T}{2(2+p)(a_1\phi + a_2\theta)} \right|.$$

Because of the term  $i \frac{\alpha}{h} S^4 \approx i C_1 S^4$ ,  $M_{h,0}$  has no unstable modes. We choose a fixed  $\rho > 0$  and consider  $(\phi, \theta)$  such that  $|\widehat{L}_\epsilon(\omega)| \geq \rho$ . We can write  $T = T(\phi, \theta) = (2+p)(a_1\phi + a_2\theta) - R(\phi, \theta)$  with

$$|R(\phi, \theta)| \leq C_2 h^3 |\omega|^3, \quad C_2 = C(a_1, a_2, p).$$

Now

$$\lim_{\epsilon \rightarrow 0} \frac{|\widehat{M}_{h,\epsilon}(\omega)|}{|\widehat{L}_\epsilon(\omega)|} = \left| \frac{iC_1 S^4 + (2+S^2)T(\phi, \theta)}{2T(\phi, \theta) + 2R(\phi, \theta)} \right|.$$

For an arbitrary  $C_3 > 0$  we consider subregions of  $T_h^2 \cap \mathbb{R}^2$ :

$$\begin{aligned}A &= \{(\phi, \theta) \mid T(\phi, \theta) \geq C_3 h^3 |\omega|^3 \text{ and } |a_1\phi + a_2\theta| \geq \rho\}; \\ B &= \{(\phi, \theta) \mid T(\phi, \theta) \leq C_3 h^3 |\omega|^3 \text{ and } |a_1\phi + a_2\theta| \geq \rho\}.\end{aligned}$$

Because  $(2+p)(a_1\phi + a_2\theta) = R(\phi, \theta) + T(\phi, \theta)$ , we know for all  $(\phi, \theta) \in B$  that  $h|\omega| \geq C\rho^{1/3}$ . For  $(\phi, \theta) \in A$  we have

$$\lim_{\varepsilon \rightarrow 0} \frac{|\widehat{M}_{h,\varepsilon}(\omega)|}{|\widehat{L}_\varepsilon(\omega)|} \geq \frac{|(2+S^2)T(\phi, \theta)|}{|2T(\phi, \theta)| + |2C_2T(\phi, \theta)/C_3|} \geq \frac{C_3}{C_2 + C_3}$$

and for  $(\phi, \theta) \in B$

$$\lim_{\varepsilon \rightarrow 0} \frac{|\widehat{M}_{h,\varepsilon}(\omega)|}{|\widehat{L}_\varepsilon(\omega)|} \geq \left| \frac{C_1 S^4}{2(C_2 + C_3)h^3|\omega|^3} \right| = C h|\omega| > C\rho^{1/3}.$$

Thus, for a given  $\rho > 0$ , and for all  $\omega \in T_h^2 \cap \mathbb{R}^2$  such that  $\lim_{\varepsilon \rightarrow 0} L_\varepsilon(\omega) \geq \rho$ , we have

$$\lim_{\varepsilon \rightarrow 0} \frac{|\widehat{M}_{h,\varepsilon}(\omega)|}{|\widehat{L}_\varepsilon(\omega)|} \geq \eta(\rho)$$

i.e.  $M_{h,\varepsilon}$  is asymptotically stable.  $\square$

#### REMARK.

The MDCP method as described above can conveniently be imbedded into an iterative process for the solution of the discrete system. Only the first step in (4.1) requires the solution of a linear system, the 2nd step is the application of a single relaxation sweep. If an iterative method for the solution of (4.1.a) is used, a sufficient number of iteration steps for its solution should be interchanged with a single step (4.1.b). If an efficient iterative method is used, such as a multiple grid method, possibly a few iteration steps for (4.1.a) are sufficient to obtain the derived effects. It is likely that also only a few iteration steps of the MDCP process are sufficient to obtain approximations to  $u_h^A$  and  $u_h^B$  that have essentially the properties of  $u_h^A$  and  $u_h^B$ . Here further research is required.

#### REMARK.

The MDCP-method makes use of the fact that the solution of equation  $L_\alpha u = f$ , with  $\alpha = \varepsilon + O(h)$ , is an approximate solution of the equation  $L_\varepsilon u = f$ . The method does not make use of any particular knowledge about the convection direction or about the location or the shape of boundary or interior layers.

## 6. NUMERICAL EXAMPLES

For a number of problems (1.1) we have computed the numerical solution. In all problems we took for  $L_{h,\varepsilon}$  the finite element discretization on a regular triangulation and for  $L_{h,\alpha}$  the artificial diffusion discretization with  $\alpha = \varepsilon + h/2$ .

By 3 different methods the solution was computed:

1) by the method of artificial diffusion (AD), i.e.  $u_h^{(1)}$ , the solution of

$$L_{h,\alpha} u_h^{(1)} = f_h.$$

- 2) by a single defect correction step (DCP), i.e.  $u_h^{(2)}$  in eq. (3.5)  
 3) by the iterative process (4.1) - (4.3). The stationary solution after the 2nd order correction step ( $u_h^B$ ) is denoted by (J;DCP) and the solution after Jacobi-relaxation ( $u_h^A$ ) by (DCP;J).

For four typical problems we compare the results of the computations. The 4 problems are:

1. *A problem with a smooth solution*

$$(6.1) \quad \varepsilon \Delta u + u_x = f(x,y) \quad \text{on } [0,1]^2,$$

with Dirichlet boundary conditions. The boundary conditions and  $f(x,y)$  are chosen such that

$$(6.2) \quad u(x,y) = \sin(\pi x)\sin(\pi y) + \cos(\pi x)\cos(3\pi y)$$

is the solution.

2. *A problem with an exponential boundary layer*

The same problem (6.1), with the Dirichlet boundary conditions and  $f(x,y)$  such that

$$(6.3) \quad u(x,y) = \sin(\pi x)\sin(\pi y) + \cos(\pi x)\cos(3\pi y) \\ + (\exp(-x/\varepsilon) - \exp(-1/\varepsilon))/(1 - \exp(-1/\varepsilon))$$

is the solution.

3. *A problem with a parabolic boundary layer*

$$(6.4) \quad \varepsilon \Delta u - u_x = f(x,y) \quad \text{on } [0,1]^2,$$

with Dirichlet boundary conditions and  $f(x,y)$  chosen such that

$$(6.5) \quad u(x,y) = \sin(\pi x)\sin(\pi y) + \cos(\pi x)\cos(3\pi y) + \\ - \sqrt{\frac{-x_0}{x-x_0}} e^{\frac{-(y-y_0)^2}{4\varepsilon(x-x_0)}},$$

with  $x_0 = -1$  and  $y_0 = 0$ , is the solution.

4. *A problem with a parabolic interior layer*

The problem (6.4) with the boundary conditions and  $f(x,y)$  chosen such that (6.5) is a solution with  $x_0 = -0.1$  and  $y_0 = 0.5$ .

In the tables 6.1 - 6.4 we show for  $\varepsilon = 10^{-6}$  the maximal error at the meshpoints in the whole unit square and (in italics) on a properly selected subregion, away from the boundaries, where the solution of the problem is smooth. We give the error on a regular square mesh with  $h = 1/8, 1/16, 1/32$ . Further we give the ratio of the error when the mesh-size is halved.



	h = 1/8 error	ratio	h = 1/16 error	ratio	h = 1/32 error
AD	0.973	1.52	0.640	1.60	0.399
	<i>0.790</i>	<i>1.37</i>	<i>0.578</i>	<i>1.50</i>	<i>0.380</i>
DCP	0.635	1.74	0.365	1.97	0.185
	<i>0.635</i>	<i>1.76</i>	<i>0.360</i>	<i>2.08</i>	<i>0.173</i>
(J;DCP)	0.507	2.39	0.212	3.64	0.0583
	<i>0.507</i>	<i>3.40</i>	<i>0.149</i>	<i>4.45</i>	<i>0.0335</i>
(DCP;J)	0.429	3.09	0.139	3.22	0.0432
	<i>0.429</i>	<i>3.35</i>	<i>0.128</i>	<i>4.40</i>	<i>0.0291</i>

TABLE 6.1. Problem 1: smooth solution,  $\epsilon = 10^{-6}$ .

	h = 1/8 error	ratio	h = 1/16 error	ratio	h = 1/32 error
AD	0.973	1.52	0.640	1.60	0.399
	<i>0.790</i>	<i>1.37</i>	<i>0.578</i>	<i>1.52</i>	<i>0.380</i>
DCP	1.08	1.28	0.845	1.28	0.662
	<i>0.635</i>	<i>1.76</i>	<i>0.360</i>	<i>2.08</i>	<i>0.173</i>
(J;DCP)	1.11	1.18	0.944	1.19	0.792
	<i>0.608</i>	<i>3.82</i>	<i>0.159</i>	<i>4.75</i>	<i>0.0335</i>
(DCP;J)	0.727	1.21	0.603	1.19	0.506
	<i>0.459</i>	<i>3.48</i>	<i>0.132</i>	<i>4.54</i>	<i>0.0291</i>

TABLE 6.2. Problem 2: exponential boundary layer,  $\epsilon = 10^{-6}$

	h = 1/8 error	ratio	h = 1/16 error	ratio	h = 1/32 error
AD	1.21	1.56	0.777	1.00	0.776
	<i>0.799</i>	<i>1.38</i>	<i>0.578</i>	<i>1.52</i>	<i>0.380</i>
DCP	0.813	1.19	0.684	0.99	0.694
	<i>0.660</i>	<i>1.61</i>	<i>0.409</i>	<i>2.09</i>	<i>0.196</i>
(J;DCP)	0.552	1.08	0.511	0.91	0.560
	<i>0.552</i>	<i>3.76</i>	<i>0.147</i>	<i>4.50</i>	<i>0.0327</i>
(DCP;J)	0.441	0.92	0.478	0.98	0.489
	<i>0.441</i>	<i>3.45</i>	<i>0.128</i>	<i>4.40</i>	<i>0.0291</i>

TABLE 6.3. Problem 3: parabolic boundary layer,  $\epsilon = 10^{-6}$ .

	h = 1/8 error	ratio	h = 1/16 error	ratio	h = 1/32 error
AD	1.11 <i>0.573</i>	1.52 <i>2.08</i>	0.730 <i>0.275</i>	1.61 <i>1.44</i>	0.453 <i>0.191</i>
DCP	0.835 <i>0.399</i>	1.74 <i>1.86</i>	0.481 <i>0.214</i>	1.32 <i>1.95</i>	0.364 <i>0.110</i>
(J;DCP)	0.735 <i>0.286</i>	1.71 <i>1.95</i>	0.427 <i>0.147</i>	1.43 <i>5.53</i>	0.298 <i>0.0266</i>
(DCP;J)	0.677 <i>0.247</i>	2.00 <i>2.01</i>	0.339 <i>0.123</i>	1.13 <i>5.67</i>	0.300 <i>0.0217</i>

TABLE 6.4. Problem 4: parabolic interior layer,  $\epsilon = 10^{-6}$ .

We notice that for  $\epsilon = 10^{-6}$  and for the given mesh-sizes, the (J;DCP) and the (DCP;J) solutions show 2nd order convergence in the smooth parts of the solutions. Thus, they show the local interior behaviour as it was predicted by the local mode analysis. The DCP solution only shows 1st order convergence for these  $h/\epsilon$  ratios, whereas the AD solutions even show less convergence.

	h = 1/8 error	ratio	h = 1/16 error	ratio	h = 1/32 error
AD	0.630	2.47	0.0255	1.71	0.0149
DCP	0.0740	3.65	0.0203	4.02	0.00505
(J;DCP)	0.0780	3.65	0.0214	4.01	0.00533
(DCP;J)	0.0693	3.46	0.0201	3.89	0.00516

TABLE 6.5. Problem 2:  $\epsilon = 1.0$ .

In table 6.5 we show the results of problem 2, now with  $\epsilon = 1.0$ . Here, of course, we recognize the classical convergence rates already for  $h = 1/8, 1/16, 1/32$ ; viz. the AD solution shows 1st order convergence, the DCP and (J;DCP) solutions are 2nd order and (DCP;J) is slightly less than 2nd order accurate.

#### REFERENCES

1. O. Axelsson, L.S. Frank & A. Van Der Sluis eds [1981],  
Analytical and numerical approaches to asymptotic problems in analysis,  
North-Holland Publ. Comp., Amsterdam.

2. A. Brandt [1980]  
Numerical stability and fast solutions to boundary value problems  
in: Boundary and Interior Layers - Computational and asymptotic methods  
(J.J.H. Miller, ed.) Boole Press, Dublin.
3. A. Brandt & N. Dinar [1979]  
Multigrid solutions to elliptic flow problems  
in: Numerical Methods for Partial Differential Equations (S.V. Parter ed.)  
Academic Press.
4. W. Hackbusch [1979]  
Bemerkungen zur iterierten Defektkorrektur und zu ihrer Kombination mit Mehr-  
gitterverfahren, Report 79-13, Math. Inst. Univ. Köln.
5. P.W. Hemker & J.J.H. Miller eds [1979]  
Numerical analysis of singular perturbation problems,  
Academic Press, London.
6. P.W. Hemker [1980]  
Fourier analysis of gridfunctions, prolongations and restrictions,  
Report NW 93/80, Mathematisch Centrum, Amsterdam.
7. P.W. Hemker [1981a]  
Introduction to multi-grid methods,  
Nw. Arch. Wisk. 29 (1981) 71-101.
8. P.W. Hemker [1981b]  
Lecture notes of a seminar on multiple grid methods,  
Report NN 24/81, Mathematisch Centrum, Amsterdam.