

# Symmetric and Synchronous Communication in Peer-to-Peer Networks

Andreas Witzel

University of Amsterdam, Amsterdam,  
and CWI, Amsterdam, The Netherlands

September 7, 2021

## Abstract

Motivated by distributed implementations of game-theoretical algorithms, we study symmetric systems, i.e. systems of processes which are intuitively “treated on an equal footing”, and the problem of attaining common knowledge between processes. We formalize our setting by defining peer-to-peer networks and appropriate symmetry notions in the context of Communicating Sequential Processes (*CSP*) [11], due to the common knowledge creating effects of its synchronous communication primitives. We then prove that *CSP* with input and output guards makes common knowledge in symmetric peer-to-peer networks possible, but not the restricted version which disallows output statements in guards and is commonly implemented. Our results extend [3].

## 1 Introduction

### 1.1 Motivation

Our original motivation comes from the distributed implementation of game-theoretical algorithms (see e.g. [9] for a discussion of the interface between game theory and distributed computing). Two important issues in the domain of game theory have always been knowledge, especially common knowledge, and symmetry between the players, also called anonymity. We will describe these issues and the connections to distributed computing in the following two paragraphs, before we motivate our choice of process calculus and the overall goal of the paper.

**Common Knowledge and Synchronization.** The concept of common knowledge has been a topic of much research in distributed computing as well as in game theory. When do processes or players “know” some fact, mutually know that they know it, mutually know that they mutually know that they know

it, and so on ad infinitum? And how crucial is the difference between arbitrarily, but finitely deep mutual knowledge and the limit case of real common knowledge?

In the area of distributed computing, the classical example showing that the difference is indeed essential is the scenario of Coordinated Attack, first considered by [8]. The game-theoretical incarnation of the underlying issue is the Electronic Mail Game [23, 17].

The basic insight of these examples is that two agents that communicate through an unreliable channel can never achieve common knowledge, and that their behavior under finite mutual knowledge can be strikingly different.

These issues are analyzed in detail in [5], in particular in a separately published part [10], including a variant where communication is reliable, but message delivery takes an unknown amount of time. In that variant, too, it is shown that only finite mutual knowledge can be attained.

However, in a synchronous communication act, sending and receiving of a message is, by definition, performed simultaneously, and in that way the agents obtain not only the pure factual information content of a message, but the sender also knows that the receiver has received the message, the receiver knows that the sender knows that, and so on ad infinitum. The communicated information immediately becomes common knowledge.

It is thus intuitively clear that attaining common knowledge and achieving synchronization between processes are closely related. Furthermore, synchronization is in itself an important subject, see e.g. [24].

**Symmetry and Peer-to-peer Networks.** In game theory, it is traditionally a fundamental assumption that players are anonymous and treated on an equal footing, in the sense that their names do not play a role and no single player is a priori distinguished from the others [19, 18].

In distributed computing, too, this kind of symmetry between processes is often a desideratum. Reasons to avoid a predetermined assignment of roles to processes or a centralized coordinator include fault tolerance, modularity, and load balancing [1].

We will consider symmetry on two levels. Firstly, the communication network used by the processes should be symmetric to some extent in order not to discriminate single processes a priori on a topological level; we will formalize this requirement by defining peer-to-peer networks. Secondly, processes in symmetric positions of the network should have equal possibilities of behavior; this we will formalize in a semantic symmetry requirement on the possible computations.

**Communicating Sequential Processes (CSP).** Since we are interested in synchronization and common knowledge, a process calculus which supports synchronous communication through primitive statements clearly has some appeal. We will focus on one of the prime examples of such calculi, namely *CSP*, introduced in [11] and revised in [12, 25]. It allows synchronous communication

by means of deterministic statements on the one hand and non-deterministic alternatives on the other hand, where the communication statements occur in guards.

Furthermore, it has been implemented in various programming languages, among the best-known of which is occam [13]. We thus have at our disposal a theoretical framework and programming tools which in principle could give us synchronization and common knowledge “for free”.

However, symmetric situations are a rather reliable source of impossibility results [6]. In particular, the restricted dialect  $CSP_{in}$  which was, for implementation issues [4], chosen to be the theoretical foundation of occam is provably [3] less expressive than the general form, called  $CSP_{i/o}$ .  $CSP_{in}$  has been used throughout the history of occam, up to and including its latest variant occam- $\pi$  [27]. This generally tends to be the case for implementations of  $CSP$ , one notable exception being a very recent extension of JCSP [28] to  $CSP_{i/o}$ .

Some of the resulting restrictions of  $CSP_{in}$  can in practice be overcome by using helper processes such as buffers [14]. Our goal therefore is to formalize the concepts mentioned above, extend the notion of peer-to-peer networks by allowing helper processes, and examine whether synchronization is feasible in either of these two dialects of  $CSP$ . We will come to the result that, while the problem can (straightforwardly) be solved in  $CSP_{i/o}$ , it is impossible to do so in  $CSP_{in}$ .

## 1.2 Related Work

This paper builds upon [3], where a semantic characterization of symmetry for  $CSP$  is given and fundamental possibility and impossibility results for the problem of electing a leader in networks of symmetric processes are proved for various dialects of  $CSP$ . More recently, this has inspired a similar work on the more expressive  $\pi$ -calculus [20], but the possibility of adding helper processes is explicitly excluded.

There has been research on how to circumvent problems resulting from the restrictions of  $CSP_{in}$ . However, solutions are typically concerned only with the factual content of messages and do not preserve synchronicity and the common knowledge creating effect of communication, for example by introducing buffer processes [14].

The same focus on factual information holds for general research on synchronizing processes with asynchronous communication. For example, in [24] one goal is to ensure that a writing process knows that no other process is currently writing; whether this is common knowledge, is not an issue.

The problem of Coordinated Attack has also been studied for models in which processes run synchronously [6]; however, the interesting property of  $CSP$  is that processes run asynchronously, which is more realistic in physically distributed systems, and synchronize only at communication statements.

Since we focus on the communication mechanisms, the results will likely carry over to other formalisms with synchronous communication facilities comparable to those of  $CSP$ .

### 1.3 Overview of the Paper

In Section 2 we give a short description of *CSP* and the dialects that we are interested in, define some basic concepts from graph theory, and recall the required notions and results for symmetric electoral systems from [3].

In Section 3 we set the stage by first formally defining the problem of pairwise synchronization that we will examine. Subsequently, we give a formalization of peer-to-peer networks which ensures a certain kind of symmetry on the topological level, and describe in what ways we want to allow them to be extended by helper processes. Finally, we adapt a concept from [3] to capture symmetry on the semantic level.

Section 4 contains two positive results and the main negative result saying that pairwise synchronization of peer-to-peer networks of symmetric processes is not obtainable in  $CSP_{in}$ , even if we allow extensions through buffers or similar helper processes.

Section 5 offers a concluding discussion.

## 2 Preliminaries

We briefly review the required concepts and results from the *CSP* calculus in Section 2.1, from graph theory in Section 2.2, and from [3] in Section 2.3. For more details see [11, 22, 3].

### 2.1 CSP

A *CSP process* consists of a sequential program which can use, besides the usual *local* statements (e.g. assignments or expression evaluations involving its local variables), two *communication* statements:

- $P!message$  to send (output) the given message to process  $P$ ;
- $P?variable$  to receive (input) a message from process  $P$  and store it in the given (local) variable.

Communication is *synchronous*, i.e., send and receive instructions block until their counterpart is available, at which point the message is transferred and both participating processes continue execution.

There are two *control structures* (see Figure 1). Each guard is a Boolean expression over local variables (which, if omitted, is taken to be true), optionally followed by a communication statement. A guard is *open* if its Boolean expression evaluates to true and its communication statement, if any, can currently be performed. A guard is *closed* if its Boolean expression evaluates to false.

The selection statement *fails* and execution is aborted if all guards are closed. Otherwise execution is suspended until there is at least one open guard. Then one of the open guards is selected non-deterministically, the required communication (if any) performed, and the associated command executed.

$$\begin{array}{ll}
\begin{array}{l}
[ \text{guard}_1 \rightarrow \text{command}_1 \\
\Box \text{guard}_2 \rightarrow \text{command}_2 \\
\vdots \\
\Box \text{guard}_k \rightarrow \text{command}_k ]
\end{array}
&
\begin{array}{l}
*\begin{array}{l}
\text{guard}_1 \rightarrow \text{command}_1 \\
\Box \text{guard}_2 \rightarrow \text{command}_2 \\
\vdots \\
\Box \text{guard}_k \rightarrow \text{command}_k ]
\end{array}
\end{array}
\end{array}$$

(a) Non-deterministic selection                      (b) Non-deterministic repetition

Figure 1: Control structures in *CSP*.

The repetition statement keeps waiting for, selecting, and executing open guards and their associated commands until all guards are closed, and then exits normally; i.e., program execution continues at the next statement.

We will sometimes use the following abbreviation to denote multiple branches of a control structure (for some finite set  $X$ ):

$$\Box_{x \in X} \text{guard}_x \rightarrow \text{command}_x$$

Various dialects of *CSP* can be distinguished according to what kind of communication statements are allowed to appear in guards. Specifically, in *CSP<sub>in</sub>* only input statements are allowed, and in *CSP<sub>i/o</sub>* both input and output statements are allowed (within the same control structure). For technical reasons, *CSP<sub>in</sub>* has been suggested from the beginning [11] and is indeed commonly used for implementations, as mentioned in Section 1.1.

**Definition 2.1.** A *communication graph* (or *network*) is a directed graph without self-loops. A *process system* (or simply *system*)  $\mathcal{P}$  with communication graph  $G = (V, E)$  is a set of component processes  $\{P_v\}_{v \in V}$  such that for all  $v, w \in V$  the program run by  $P_v$  (resp.  $P_w$ ) contains an output command to  $P_w$  (resp. input command from  $P_v$ ) only if  $(v, w) \in E$ . In that case we say that  $G$  *admits*  $\mathcal{P}$ . We identify vertices  $v$  and associated processes  $P_v$  and use them interchangeably.

**Example 2.2.** Figure 2 shows a simple network  $G$  with the vertex names written inside the vertices, and a *CSP<sub>i/o</sub>* program run by two processes which make up a system  $\mathcal{P} := \{P_0, P_1\}$ . Obviously,  $G$  admits  $\mathcal{P}$ . The intended behavior is that the processes send each other, in non-deterministic order, a message containing their respective process name. Since communication is synchronous, it is guaranteed that both processes execute each communication statement synchronously at the time when the message is transmitted. In a larger context, executing this code fragment would have the effect that the participating processes synchronize, i.e., wait for each other and jointly perform the communication. In terms of knowledge, this fact as well as the transmitted message (which can of course be more interesting than just the process names) become common knowledge between the processes.

**Definition 2.3.** A *state* of a system  $\mathcal{P}$  is the collection of all component processes' (local) variables together with their current execution positions. A *com-*

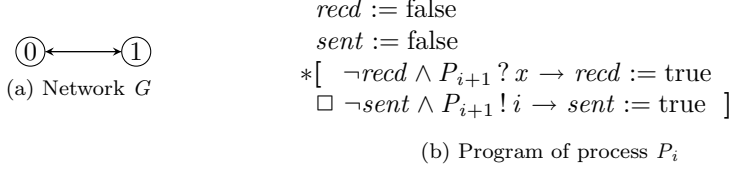


Figure 2: Network and program run by  $P_0$  and  $P_1$  in Example 2.2. Addition of process names here and in all further example programs is modulo 2.

*putation step* is a transition from one state to another, involving either one component process executing a local statement, or two component processes jointly executing a pair of matching (send and receive) communication statements. The valid computation steps are determined by the state of the system.

A *computation* is a maximal sequence of valid computation steps, i.e. a sequence which is not a prefix of any other sequence of valid computation steps. A computation

- is *properly terminated* if all component processes have reached their last instruction,
- *diverges* if it is infinite, and
- is in *deadlock* if it is finite but not properly terminated.

**Example 2.4.** Figure 3 shows a computation of the system from Figure 2. It is finite and both processes reach the end of their respective program, so it is properly terminated. Note that the exact order in which, for example, the processes get to initialize their local variables is non-deterministic, so there are other computations with these steps exchanged. Only certain restrictions to the order apply, e.g. that the steps within one process are ordered corresponding to its program, or that both processes must have evaluated the Boolean guards before they can participate in the subsequent communication.

## 2.2 Graph Theory

We state some fundamental notions concerning directed graphs. By slight abuse of notation, we will write “id” for the identity function defined on the domain of whatever function it is compared to.

**Definition 2.5.** Two vertices  $a, b \in V$  of a graph  $G = (V, E)$  are *strongly connected* if there is a path from  $a$  to  $b$  and a path from  $b$  to  $a$ ;  $G$  is strongly connected if all pairs of vertices are.

Two vertices  $a, b \in V$  are *directly connected* if  $(a, b) \in E$  or  $(b, a) \in E$ ;  $G$  is directly connected if all pairs of vertices are.

```

P0 : assign false to recd
P1 : assign false to recd
P1 : assign false to sent
P0 : assign false to sent
P1 : evaluate Boolean guards
P0 : evaluate Boolean guards
P0, P1 : send 0 from P0 to P1's variable x
P0 : assign true to sent
P0 : evaluate Boolean guards
P1 : assign true to recd
P1 : evaluate Boolean guards
P0, P1 : send 1 from P1 to P0's variable x
P1 : assign true to sent
P0 : assign true to recd
P0 : evaluate Boolean guards and exit repetition
P1 : evaluate Boolean guards and exit repetition

```

Figure 3: A properly terminating computation of the system from Example 2.2.

**Definition 2.6.** An *automorphism* of a graph  $G = (V, E)$  is a permutation  $\sigma$  of  $V$  such that for all  $v, w \in V$ ,

$$(v, w) \in E \text{ implies } (\sigma(v), \sigma(w)) \in E .$$

The *automorphism group*  $\Sigma_G$  of a graph  $G$  is the set of all automorphisms of  $G$ . The least  $p > 0$  with  $\sigma^p = \text{id}$  is called the *period* of  $\sigma$ .

The *orbit* of  $v \in V$  under  $\sigma \in \Sigma_G$  is  $O_v^\sigma := \{\sigma^p(v) \mid p \geq 0\}$ . An automorphism  $\sigma$  is *well-balanced* if the orbits of all vertices have the same cardinality, or alternatively, if for all  $p \geq 0$ ,

$$\sigma^p(v) = v \text{ for some } v \in V \text{ implies } \sigma^p = \text{id} .$$

We will usually use the set  $\Sigma_G^{wb} \setminus \{\text{id}\}$  of *non-trivial* well-balanced automorphisms of a graph  $G$ , that is those with period greater than 1.

A subset  $W \subseteq V$  is called *invariant* under  $\sigma \in \Sigma_G$  if  $\sigma(W) = W$ , i.e. if  $W$  is an orbit under  $\sigma$ ; it is called invariant under  $\Sigma_G$  if it is invariant under all  $\sigma \in \Sigma_G$ .

**Example 2.7.** Figure 4 shows two graphs  $G$  and  $H$  and automorphisms  $\sigma \in \Sigma_G$  with period 3 and  $\tau \in \Sigma_H$  with period 2. Both are well-balanced since, e.g.,  $O_1^\tau = O_3^\tau = \{1, 3\}$  and  $O_2^\tau = O_4^\tau = \{2, 4\}$  all have the same cardinality. We have  $\Sigma_H = \{\text{id}, \tau\}$ , so  $\{1, 3\}$  and  $\{2, 4\}$  are invariant under  $\Sigma_H$ .

## 2.3 Symmetric Electoral Systems

We take over the semantic definition of symmetry from [3]. As discussed there, syntactic notions of symmetry are difficult to formalize properly; requiring that “all processes run the same program” is too fuzzy. We will skip the formal details since we are not going to use them. The interested reader is referred to [3].

**Definition 2.8** (adapted from [3, Definition 2.2.2]). A system  $\mathcal{P}$  with communication graph  $G = (V, E)$  is *symmetric* if for each automorphism  $\sigma \in \Sigma_G$  and

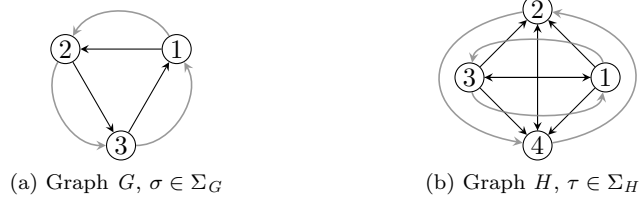


Figure 4: Two graphs with non-trivial well-balanced automorphisms, indicated by gray, bent arrows.

each computation  $C$  of  $\mathcal{P}$ , there is a computation  $C'$  of  $\mathcal{P}$  in which, for each  $v \in V$ , process  $P_{\sigma(v)}$  performs the same steps as  $P_v$  in  $C$ , modulo changing via  $\sigma$  the process names occurring in the computation (e.g. as communication partners).

The intuitive interpretation of this symmetry notion is as follows. Any two processes which are not already distinguished by the communication graph itself, i.e. which are related by some automorphism, must have equal possibilities of behavior. That is, whatever behavior one process exhibits in some particular possible execution of the system (i.e., in some computation), the other process must exhibit in some other possible execution of the system, localized to its position in the graph by appropriate process renaming. Taken back to the syntactic level, this can be achieved by running the same program in both processes, which must not make use of any externally given distinctive features like, for example, an ordering of the process names.

**Example 2.9.** The system from Figure 2 is symmetric. It is easy to see that, for example, if we swap all 0s and 1s in the computation shown in Figure 3, we still have a computation of  $\mathcal{P}$ . Note that programs are allowed to access the process names, and indeed they do; however, they do not, for example, use their natural order to determine which process sends first.

**Example 2.10.** On the other hand, consider the system  $\mathcal{Q} = \{Q_0, Q_1\}$  running the program in Figure 5. There is obviously a computation where  $Q_0$  sends its process name 0 to  $Q_1$ ; since the two vertices of the communication graph are related by an automorphism, symmetry would require that there also be a computation where  $Q_1$  sends its process name 1 to  $Q_0$ . However, such a computation does not exist due to the use of the process name for determining the communication role, so the system is not symmetric.

$$\begin{array}{l} [ \quad i = 0 \rightarrow Q_{i+1} ! i \\ \quad \square \quad i = 1 \rightarrow Q_{i+1} ? x \quad ] \end{array}$$

Figure 5: Asymmetric program run by  $Q_0$  and  $Q_1$  in Example 2.10.



We now recall a classical problem for networks of processes, pointed out by [16].

**Definition 2.11** (from [3, Definition 1.2.1]). A system  $\mathcal{P}$  is an *electoral system* if

- (i) all computations of  $\mathcal{P}$  are properly terminating and
- (ii) each process of  $\mathcal{P}$  has a local variable **leader**, and at the time of termination all these variables contain the same value, namely the name of some process  $P \in \mathcal{P}$ .

We now restate the impossibility result which our paper builds on, combining a graph-theoretical characterization with the symmetry notion and electoral systems.

**Theorem 2.12** (from [3, Theorem 3.3.2]). *Suppose a network  $G$  admits some well-balanced automorphism  $\sigma$  different from id. Then  $G$  admits no symmetric electoral system in  $CSP_{in}$ .*

## 3 Setting the Stage

### 3.1 Pairwise Synchronization

Intuitively, if we look at synchronization as part of a larger system, a process is able to synchronize with another process if it can execute an algorithm such that a direct communication (of any message) between the two processes takes place. This may be the starting point of some communication protocol to exchange more information, or simply be taken as an event creating common knowledge about the processes' current progress of execution.

Communication in *CSP* always involves exactly two processes and facilities for synchronous broadcast do not exist, thus synchronization is inherently pairwise only. This special case is still interesting and has been subject to research, see e.g. [21].

Focusing on the synchronization algorithm, we want to guarantee that it allows all pairs of processes to synchronize. To this end, we require existence of a system where in all computations, all pairs of processes synchronize. Most probably, in a real system not all pairs of processes need to synchronize in all executions. However, if one has an algorithm which in principle allows that, then one could certainly design a system where they actually do; and, vice versa, if one has a system which is guaranteed to synchronize all pairs of processes, then one can obviously use its algorithms to synchronize any given pair. Therefore we use the following formal notion.

**Definition 3.1.** A system  $\mathcal{P}$  of processes (*pairwise*) *synchronizes*  $\mathcal{Q} \subseteq \mathcal{P}$  if all computations of  $\mathcal{P}$  are finite and properly terminating and contain, for each pair of processes  $P_a, P_b \in \mathcal{Q}$ , a direct communication from  $P_a$  to  $P_b$  or vice versa.

**Example 3.2.** The system from Figure 2 synchronizes  $\{P_0, P_1\}$ .

Note that the program considered so far is not a valid  $CSP_{in}$  program, since there an input statement appears within a guard. If we want to restrict ourselves to  $CSP_{in}$  (for example, to implement the program in occam), we have to get rid of that statement. Attempts to simply move it out of the guard fail since the symmetric situation inevitably leads to a system which may deadlock.

To see this, consider the system  $\mathcal{P}' = \{P'_0, P'_1\}$  with the program shown in Figure 6. There is no guarantee that not both processes enter the second clause of the repetition at the same time and then block forever at the output statement, waiting for each other to become ready for input. A standard workaround [14] for such cases is to introduce buffer processes mediating between the main processes, in our case resulting in the extended system  $\mathcal{R} = \{R_0, R'_0, R_1, R'_1\}$  shown in Figure 7.

$$\begin{aligned} & recd := \text{false} \\ & sent := \text{false} \\ & * [ \neg recd \wedge P'_{i+1} ? x \rightarrow recd := \text{true} \\ & \quad \square \neg sent \rightarrow P'_{i+1} ! i; sent := \text{true} ] \end{aligned}$$

Figure 6: Program of process  $P'_i$  potentially causing deadlock.

$$\begin{aligned} & recd := \text{false} \\ & sent := \text{false} \\ & * [ \neg recd \wedge R'_{i+1} ? x \rightarrow recd := \text{true} \\ & \quad \square \neg sent \rightarrow R'_i ! i; sent := \text{true} ] \end{aligned}$$

(a) Program of main process  $R_i$

$$\begin{aligned} & R_i ? y \\ & R_{i+1} ! y \end{aligned}$$

(b) Program of buffer process  $R'_i$




Figure 7: Extended system with main processes  $R_0$  and  $R_1$  and buffer processes  $R'_0$  and  $R'_1$  together with the underlying communication network.

While the actual data transmitted between the main processes remains the same, this system obviously cannot synchronize  $\{R_0, R_1\}$ , since there is not even a direct link in the communication network. This removes the synchronizing and common knowledge creating effects of communication. Even though a buffer might notify its main process when its message is delivered, then notify the communication partner about the notification, and so on, synchronicity is not restored and mutual knowledge only achieved to a finite (if arbitrarily high) level, as discussed in Section 1.1.

The obvious question now is: Is it possible to change the program or use buffer or other helper processes in more complicated and smarter ways to negotiate between the main processes and aid them in establishing direct communications?

To attack this question, in the following Section 3.2 we will formalize the kind of communication networks we are interested in and define how they may be extended in order to allow for helper processes without affecting the symmetry inherent in the original network.

### 3.2 Peer-to-peer networks

The idea of peer-to-peer networks is to have nodes which can communicate with each other directly and on an equal footing, i.e. there is no predetermined client/server architecture or central authority coordinating the communication. We first formalize the topological prerequisites for this, and then adapt the semantic symmetry requirement to our setting.

**Definition 3.3.** A *peer-to-peer network* is a communication graph  $G = (V, E)$  with at least two vertices (also called nodes) such that

- (i)  $G$  is strongly connected,
- (ii)  $G$  is directly connected, and
- (iii) we have  $\Sigma_G^{wb} \setminus \{\text{id}\} \neq \emptyset$ .

In this definition, (i) says that each node has the possibility to contact any other node, reflecting the fact that there are no predetermined client/server roles; (ii) ensures that all pairs of nodes have a direct connection at least in one direction, without which pairwise synchronization by definition would be impossible; and (iii) requires a kind of symmetry in the network. This last item is implied by the more intuitive requirement that there be some  $\sigma \in \Sigma_G$  with only one orbit, i.e. an automorphism relating all nodes to each other and thus making sure that they are topologically on an equal footing. The requirement we use is less restrictive and suffices for our purposes.

**Example 3.4.** See Figure 4 for two examples of peer-to-peer networks.

We will consider extensions of a peer-to-peer network which we will consider in order to allow for helper processes while preserving the symmetry inherent in the network. The intuitive background for this kind of extensions is that we view the peers, i.e. the nodes of the original network, as processors each running a main process, while the added nodes can be thought of as helper processes running on the same processor as their respective main process. Communication connections between processors are physically given, while inside a processor they can be created as necessary.

**Definition 3.5.** Let  $G = (V, E)$  be a peer-to-peer network, then  $G' = (V', E')$  is a *symmetry-preserving extension* of  $G$  iff there is a collection  $\{S_v\}_{v \in V}$  partitioning  $V'$  such that

- (i) for all  $v \in V$ ,  $v \in S_v$ ,
- (ii) all  $v \in V$  and  $v' \in S_v \setminus \{v\}$  are strongly connected (possibly via nodes  $\notin S_v$ ),
- (iii) for all  $v, w \in V$ ,  $E' \cap (S_v \times S_w) \neq \emptyset$  iff  $(v, w) \in E$ ;
- (iv) there is, for each  $\sigma \in \Sigma_G$ , an automorphism  $\iota_\sigma \in \Sigma_{G'}$  extending  $\sigma$  such that  $\iota_\sigma(S_v) = S_{\sigma(v)}$  for all  $v \in V$ .

*Remark.* In general, the collection  $\{S_v\}_{v \in V}$  may not be unique. When we refer to it, we implicitly fix an arbitrary one.


Intuitively, these requirements are justified as follows:

- (i) Each  $S_v$  can be seen as the collection of processes running on the processor at vertex  $v$ , including its main process  $P_v$ .
- (ii) The main process should be able to communicate (at least indirectly) in both ways with each helper process.
- (iii) While communication links within one processor can be created freely, links between processes on different processors are only possible if there is a physical connection, that is a connection in the original peer-to-peer network; also, if there was a connection in the original network, then there should be one in the extension in order to preserve the network structure.
- (iv) Lastly, to preserve symmetry, each automorphism of the original network must have an extension which maps all helper processes to the same processor as their corresponding main process.

**Example 3.6.** See Figure 8 for an example of a symmetry-preserving extension. Note that condition (iii) of Definition 3.5 is liberal enough to allow helper processes to communicate directly with processes running on other processors, and indeed, e.g.  $2c$  has a link to  $3$ . It also allows several communication links on one physical connection, reflected by the fact that there are three links connecting  $S_2$  to  $S_3$ . Furthermore, (ii) is satisfied in that the main processes are strongly connected with their helper processes, although, as e.g. with  $2$  and  $2c$ , indirectly and through processes on other processors.

### 3.3 $G$ -symmetry

Corresponding to the intuition of processors with main and helper processes, we weaken Definition 2.8 such that only automorphisms are considered which keep the set of main processes invariant and map helper processes to the same processor as their main process. There are cases where the main processor otherwise would be required to run the same program as some helper process.

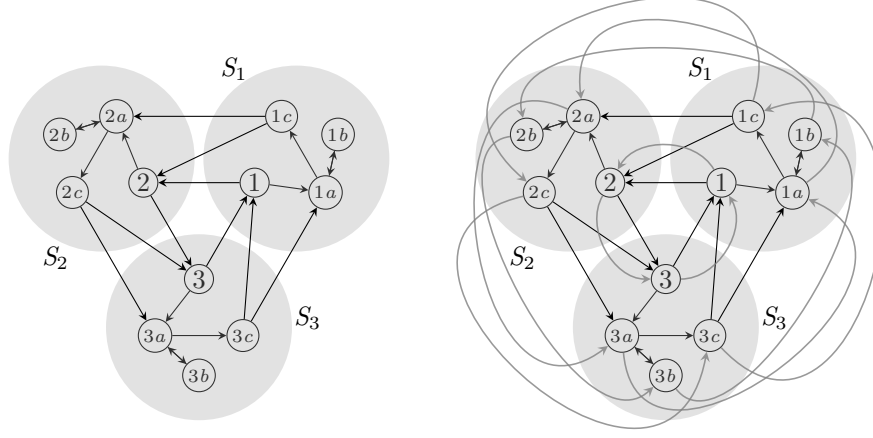

(a) Symmetry-preserving extension of the network from Figure 4(a). (b) Extended automorphism  $\iota_\sigma$  as required by Definition 3.5.

Figure 8: A symmetry-preserving extension (illustrating Definition 3.5).

**Definition 3.7** ( $G$ -symmetry). A system  $\mathcal{P}$  whose communication graph  $G'$  is a symmetry-preserving extension of some peer-to-peer network  $G = (V, E)$  is called  $G$ -symmetric if Definition 2.8 holds with respect to those automorphisms  $\sigma \in \Sigma_{G'}$  satisfying, for all  $v \in V$ ,

- (i)  $\sigma(V) = V$  and
- (ii)  $\sigma(S_v) = S_{\sigma(v)}$ .

This is weaker than Definition 2.8, since there we require the condition to hold for all automorphisms.

**Example 3.8.** To illustrate the impact of  $G$ -symmetry, Figure 9 shows a network  $G$  and an extension where symmetry intuitively requires all processes to run the same program.  $G$ -symmetry disregards the automorphism which causes this and considers only those which keep the set of main processes invariant, i.e. the nodes of the original network  $G$ , thus allowing them to run different programs than the helper processes.

Note that the main processes do not have a direct connection in the extension, which is permitted by Definition 3.5 although it will obviously make it impossible for them to synchronize.

Now that we have formalized peer-to-peer networks and the symmetry-preserving extensions which we want to allow, we are ready to prove positive and negative results about feasibility of pairwise synchronization.

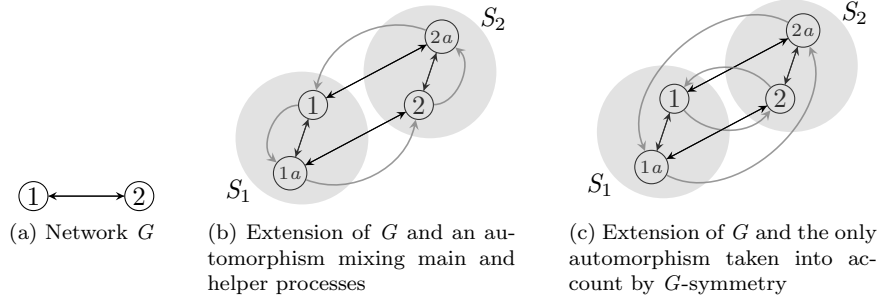


Figure 9: A network  $G$  and an extension which has an automorphism mixing main and helper processes, disregarded by  $G$ -symmetry.

## 4 Results

### 4.1 Positive Results

First, we state the intuition foreshadowed in Section 3.1, namely that  $CSP_{i/o}$  does allow for symmetric pairwise synchronization in peer-to-peer networks.

**Theorem 4.1.** *Let  $G = (V, E)$  be a peer-to-peer network. Then  $G$  admits a symmetric system pairwise synchronizing  $V$  in  $CSP_{i/o}$ .*

*Proof.* A system which at each vertex  $v \in V$  runs the program shown in Figure 10 is symmetric and pairwise synchronizes  $V$ . Each process simply waits for each other process in parallel to become ready to send or receive a dummy message, and exits once a message has been exchanged with each other process.  $\square$

```

for each  $w \in V$  do  $sync_w := \text{false}$ 
 $W_{in} := \{w \in V \mid (w, v) \in E\}$ 
 $W_{out} := \{w \in V \mid (v, w) \in E\}$ 
* [
   $\square_{w \in W_{in}} \neg sync_w \wedge P_w ? x \rightarrow sync_w := \text{true}$ 
   $\square_{w \in W_{out}} \neg sync_w \wedge P_w ! 0 \rightarrow sync_w := \text{true}$ 
]

```

Figure 10: The program run at each vertex  $v \in V$  in the proof of Theorem 4.1.

As a second result, we show that by dropping the topological symmetry requirement for peer-to-peer networks, under certain conditions we can achieve symmetric pairwise synchronizing systems even in  $CSP_{in}$ .

**Theorem 4.2.** *Let  $G = (V, E)$  be a network satisfying only the first two conditions of Definition 3.3, i.e.  $G$  is strongly connected and directly connected. If  $G$*

admits a symmetric electoral system and there is some vertex  $v \in V$  such that  $(v, a) \in E$  and  $(a, v) \in E$  for all  $a \in V$ , then  $G$  admits a symmetric system pairwise synchronizing  $V$  in  $CSP_{in}$ .

*Proof.* First, the electoral system is run to determine a temporary leader  $v'$ . Then  $v'$  chooses a coordinator  $v$  that is directly and in both directions connected to all other vertices, and broadcasts its name. Broadcasting can be done by choosing a spanning tree and transmitting the broadcast information together with the definition of the tree along the tree, as in the proof of [3, Theorem 2.3.1, Phase 2] (the required strong connectivity holds for  $G$  by assumption). The other processes each send one message to  $v$  and then wait to receive commands from  $v$  according to which they perform direct communications with each other, while  $v$  receives one message from each other process and uses the obtained order to send out the commands.

This can be achieved by running the following program at each process  $P_c$ ,  $c \in V$ , after having elected the temporary leader  $v'$ :

- If  $c = v'$ , choose some  $v \in V$  such that  $(v, a) \in E$  and  $(a, v) \in E$  for all  $a \in V$ , and broadcast the name  $v$ ; otherwise obtain the broadcast name.
- If  $c = v$ :

- Receive exactly one message from each other process in some non-deterministic order and remember the order:

```

     $W := V \setminus \{v\}$ 
    for each  $w \in W$  do  $order_w := -1$ 
     $count := 0$ 
    *[  $\square_{w \in W} order_w = -1 \wedge P_w ? x \rightarrow$ 
       $order_w := count$ 
       $count := count + 1$ 
    ]

```

- Issue commands to the other processes according to the obtained order:

```

    for each  $a, b \in V \setminus \{v\}, a \neq b$  do
      [  $order_a < order_b \wedge (a, b) \in E \rightarrow$ 
         $P_a ! \text{"contact } b\text{"}$ 
         $P_b ! \text{"listen to } a\text{"}$ 
      ]
      [  $order_a \geq order_b \vee (a, b) \notin E \rightarrow$ 
         $P_b ! \text{"contact } a\text{"}$ 
         $P_a ! \text{"listen to } b\text{"}$ 
      ]
    ]
done

```

otherwise (i.e.  $c \neq v$ ):

- Send dummy message to  $P_v$ :  
 $P_v ! 0$

- Execute the commands from  $v$  until one message has been exchanged with each other process:

```

    num := |V \ {c, v}|
    *[ num > 0 ∧ P_v ? m →
      [ m = “contact w” → P_w ! 0
        □ m = “listen to w” → P_w ? x
      ]
      num := num - 1
    ]

```

□

**Example 4.3.** See Figure 11 for an example of a network which admits a symmetric system pairwise synchronizing all its vertices in  $CSP_{in}$ . The fact that the network admits a symmetric electoral system can be established as for [3, Fig. 4]. There the property is used that  $\{1, 2\}$  and  $\{3, 4, 5\}$  are invariant under the network’s automorphism group and the associated processes can thus behave differently; this property is not affected by the edges we have added (note that the edges between the lower nodes are only in one direction).




Figure 11: A network which by Theorem 4.2 admits a symmetric system pairwise synchronizing all its vertices in  $CSP_{in}$ . Note that the connections between vertices 3, 4 and 5 are only in one direction.

This result could be generalized, e.g. by weakening the conditions on  $v$  and taking care that the commands will reach the nodes at least indirectly. Since our main focus is the negative result, we will not pursue this further.

## 4.2 Negative Result

In the following we will establish the main result saying that, even if we extend a peer-to-peer network  $G$  by helper processes (in a symmetry-preserving way), it is not possible to obtain a network which admits a  $G$ -symmetric system pairwise synchronizing the nodes of  $G$  in  $CSP_{in}$ .

To this end, we derive a contradiction with Theorem 2.12 by proving the following intermediate steps (let  $G$  denote a peer-to-peer network and  $G'$  a symmetry-preserving extension):

- Lemma 4.5: If  $G'$  admits a  $G$ -symmetric system pairwise synchronizing the nodes of  $G$  in  $CSP_{in}$ , it admits a  $G$ -symmetric electoral system in  $CSP_{in}$ .



- Lemma 4.6:  $G'$  has a non-trivial well-balanced automorphism taken into account by  $G$ -symmetry (i.e. satisfying the two conditions of Definition 3.7).
- Lemma 4.8: We can extend  $G'$  in such a way that there exists a non-trivial well-balanced automorphism (derived from the previous result),  $G$ -symmetry is reduced to symmetry, and admittance of an electoral system is preserved.

We start by stating an immediate result and then establish the lemmas.

**Fact 4.4.** *Any symmetry-preserving extension of a peer-to-peer network is strongly connected.*

*Proof.* Follows directly from Definitions 3.3 and 3.5.  $\square$

**Lemma 4.5.** *If some symmetry-preserving extension of a peer-to-peer network  $G = (V, E)$  admits a  $G$ -symmetric system pairwise synchronizing  $V$  in  $CSP_{in}$ , then it admits a  $G$ -symmetric electoral system in  $CSP_{in}$ .*

*Proof.* The following steps describe the desired electoral system (using the fact that under  $G$ -symmetry processes of nodes  $\in V$  may behave differently from those of nodes  $\notin V$ ):

- All processes run the assumed  $G$ -symmetric pairwise synchronization program, with the following modification for the processes in  $\mathcal{P} := \{P_v \mid v \in V\}$  (this is similar to the proof of [3, Theorem 4.1.2, Phase 1] and can intuitively be seen as a kind of tournament):
  - Each of these processes has an additional local variable **winning** initialized to **true**.
  - After each communication statement with some other  $P \in \mathcal{P}$ , insert a second communication statement with  $P$  in the same direction:
    - \* If it was a “send” statement, send the value of **winning**.
    - \* If it was a “receive” statement, receive a Boolean value, and if the received value is **true**, set **winning** to **false**.

Note that, since the program pairwise synchronizes  $V$ , each pair of processes associated to vertices in  $V$  has had a direct communication at the end of execution, and thus there is exactly one process in the system which has a local variable **winning** that is set to **true**.

- This process declares itself the leader and broadcasts its name; all processes set their variable **leader** accordingly. As in the proof of Theorem 4.2, broadcasting can be done using a spanning tree. The required strong connectivity is guaranteed by Fact 4.4.  $\square$

**Lemma 4.6.** *For any symmetry-preserving extension  $G' = (V', E')$  of a peer-to-peer network  $G = (V, E)$ , there is  $\sigma' \in \Sigma_{G'}^{wb} \setminus \{\text{id}\}$  such that  $\sigma'(V) = V$  and  $\sigma'(S_u) = S_{\sigma'(u)}$  for all  $u \in V$ .*

*Proof.* Take an arbitrary  $\sigma \in \Sigma_G^{wb} \setminus \{\text{id}\}$  (exists by Definition 3.3) and let  $\iota$ , to save indices, denote the  $\iota_\sigma$  required by Definition 3.5. If  $\iota \in \Sigma_{G'}^{wb} \setminus \{\text{id}\}$  we are done; otherwise we can construct a suitable  $\sigma'$  from  $\iota$  by “slicing” orbits of  $\iota$  which are larger than the period of  $\sigma$  into orbits of that size. See Example 4.7 for an illustration of the following proof.

Let  $p$  denote the period of  $\sigma$  and pick an arbitrary  $v \in V$ . For simplicity, we assume that  $\sigma$  has only one orbit; if it has several, the proof extends straightforwardly by picking one  $v$  from each orbit and proceeding with them in parallel.

For all  $u \in S_v$  let  $p_u := |O_u^\iota|$  and note that  $p_u \geq p$  and, for all  $t \in O_u$ ,  $p_t = p_u$ . We define  $\sigma' : V' \rightarrow V'$  as follows:

$$\sigma'(u) := \begin{cases} \iota^{p_u-p+1}(u) & \text{if } u \in S_v \\ \iota(u) & \text{otherwise.} \end{cases}$$

Now we can show that

- $\sigma'(V) = V$ ,  $\sigma' \neq \text{id}$ : Follows from  $\iota \upharpoonright_V = \sigma$  and  $p_v = p$  and thus  $\sigma' \upharpoonright_V = \sigma$
- $\sigma' \in \Sigma_{G'}$ : With (iv) from Definition 3.5 we obtain that, for  $u \in S_v$ ,  $p_u$  must be a multiple of  $p$ , and  $\sigma'(O_u^\iota \cap S_v) = \iota(O_u^\iota \cap S_v)$ , thus  $\sigma'$  is a permutation of  $V'$  since  $\iota$  is one. Furthermore, for  $t, u \in S_v$ , we have  $\iota^{p_t(p_u-1)}(t) = t$  and  $\iota^{p_u(p_t-1)}(u) = u$  and therefore

$$\begin{aligned} (\sigma'(t), \sigma'(u)) &= (\iota^{p_t-p+1}(t), \iota^{p_u-p+1}(u)) \\ &= (\iota^{p_t p_u - p + 1}(t), \iota^{p_t p_u - p + 1}(u)) , \end{aligned}$$

thus  $\sigma'$  also inherits edge-preservation from  $\iota$ .

- $\sigma'(S_u) = S_{\sigma'(u)}$ ,  $\sigma'$  well-balanced: The above-mentioned fact that for all  $u \in S_v$  we have  $\sigma'(O_u^\iota \cap S_v) = \iota(O_u^\iota \cap S_v)$ , together with (iv) from Definition 3.5 implies that also  $\sigma'(S_u) = S_{\sigma(u)}$  for all  $u \in V$ . For all  $v' \in V'$ , well-balancedness of  $\sigma$  and disjointness of the  $S_u$  imply that  $\sigma'^q(v') \neq v'$  for  $0 < q < p$ . On the other hand, since each orbit of  $\sigma$  has size  $p$  and contains exactly one element from  $S_v$  (namely  $v$ ), we have that

$$\begin{aligned} \sigma'^p(v') &= \iota^{(p_u-p+1)+(p-1)}(v') && \text{for some } u \in O_v^\iota, \\ &= \iota^{p_u}(v') = \iota^{p_{v'}}(v') = v' . \end{aligned} \quad \square$$

**Example 4.7.** Consider the extended peer-to-peer network  $G'$  shown in Figure 12(a) with automorphism  $\iota_\sigma$  as required by Definition 3.5. We illustrate the construction of  $\sigma'$  given in the proof of Lemma 4.6.

We have  $p = 2$  (the period of  $\sigma = \iota_\sigma \upharpoonright_{\{1,2\}}$ ), and we pick vertex  $v = 2$ . For the elements of  $S_2$ , we obtain  $p_2 = p = 2$  and  $p_{2a} = p_{2b} = p_{2c} = 6$  since, e.g.,  $O_{2a}^\iota = \{2a, 1a, 2c, 1b, 2b, 1c\}$ . Thus  $\sigma'$  is defined as follows:

$$\sigma'(u) = \begin{cases} \iota(u) & \text{if } u = 2 \\ \iota^5(u) & \text{if } u \in S_2 \setminus \{2\} \\ \iota(u) & \text{if } u \in S_1 . \end{cases}$$

This  $\sigma'$  is depicted in Figure 12(b). All orbits have the same cardinality, namely 2, and the remaining claims of Lemma 4.6 are also satisfied.

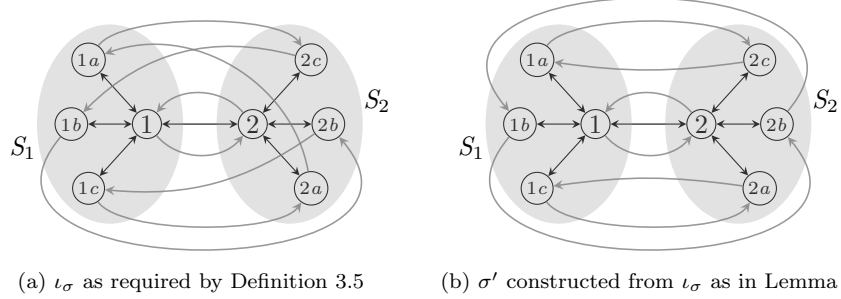


Figure 12: An extended peer-to-peer network  $G'$  illustrating Lemma 4.6.

**Lemma 4.8.** *Any symmetry-preserving extension  $G' = (V', E')$  of a peer-to-peer network  $G = (V, E)$  can be extended to a network  $H$  such that*

- (i)  $\Sigma_H^{wb} \setminus \{\text{id}\} \neq \emptyset$ , and
- (ii) if  $G'$  admits a  $G$ -symmetric electoral system in  $\text{CSP}_{in}$ , then  $H$  admits a symmetric electoral system in  $\text{CSP}_{in}$ .

*Proof.* The idea is to add an “identifying structure” to all elements of  $V$ , which forces all automorphisms to keep  $V$  invariant and map the  $S_v$  to each other correspondingly (see Figure 13). Formally, let  $K = |V'|$  and, denoting the inserted vertices by  $i_{\cdot, \cdot}$ , for each  $v \in V$  let

$$I_v := \bigcup_{k=1}^K \{i_{v,k}\}$$

$$E_v := \{(v, i_{v,1})\} \cup \bigcup_{k=1}^{K-1} \{(i_{v,k}, i_{v,k+1}), (i_{v,k+1}, v)\} \cup \bigcup_{w \in S_v} \{(i_{v,K}, w)\} ,$$

and let

$$H := \left( V' \cup \bigcup_{v \in V} I_v, E' \cup \bigcup_{v \in V} E_v \right) .$$

Now we can prove the two claims.

- (i) Let  $\sigma \in \Sigma_{G'}^{wb} \setminus \{\text{id}\}$  with  $\sigma(V) = V$  and  $\sigma(S_v) = S_{\sigma(v)}$  for all  $v \in V$  (such a  $\sigma$  exists by Lemma 4.6), then

$$\sigma \cup \bigcup_{v \in V} \bigcup_{k=1}^K \{i_{v,k} \mapsto i_{\sigma(v),k}\} \in \Sigma_H^{wb} \setminus \{\text{id}\} .$$

- (ii)  $H$  is still a symmetry-preserving extension of  $G$  via (straightforward) extensions of the  $S_v$ . The discriminating construction (notably the fact that the vertices from  $V$  now are guaranteed to have more edges than any vertex not in  $V$ , but still the same number with respect to each other) has the effect that  $\Sigma_H$  consists only of extensions, as above, of those  $\sigma \in \Sigma_{G'}$  for which  $\sigma(V) = V$  and  $\sigma(S_v) = S_{\sigma(v)}$  for all  $v \in V$ . Thus, any  $G$ -symmetric system with communication graph  $H$  is a symmetric system with communication graph  $H$ .

Additionally, the set of all  $i_{v,k}$  is invariant under  $\Sigma_H$  due to the distinctive structure of the  $I_v$ , thus the associated processes are allowed to differ from those of the remaining vertices. A symmetric electoral system in  $CSP_{in}$  can thus be obtained by running the original  $G$ -symmetric electoral system on all members of  $G'$  and having each  $v \in V$  inform  $i_{v,1}$  about the leader, while all  $i_{v,k}$  simply wait for and transmit the leader information.  $\square$

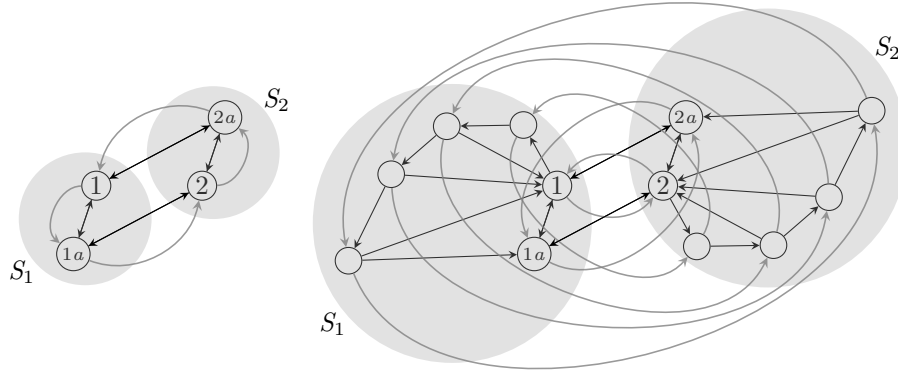


Figure 13: The network from Figure 9, shown with an automorphism disregarded by  $G$ -symmetry, and the extension given in Lemma 4.8 invalidating automorphisms of this kind shown with the only remaining automorphism.

Now we have gathered all prerequisites to prove our main result.

**Theorem 4.9.** *There is no symmetry-preserving extension of any peer-to-peer network  $G = (V, E)$  that admits a  $G$ -symmetric system pairwise synchronizing  $V$  in  $CSP_{in}$ .*

*Proof.* Assume there is such a symmetry-preserving extension  $G'$ . Then by Lemma 4.5 it also admits a  $G$ -symmetric electoral system in  $CSP_{in}$ . According to Lemma 4.8, there is then a network  $H$  with  $\Sigma_H^{wb} \setminus \{\text{id}\} \neq \emptyset$  that admits a symmetric electoral system in  $CSP_{in}$ . This is a contradiction to Theorem 2.12.  $\square$

## 5 Conclusions

We have provided a formal definition of peer-to-peer networks and adapted a semantic notion of symmetry for process systems communicating via such networks. In this context, we have defined and investigated the existence of pairwise synchronizing systems, which are directly useful because they achieve synchronization, but also because they create common knowledge between processes. Focusing on two dialects of the *CSP* calculus, we have proved the existence of such systems in  $CSP_{i/o}$ , as well as the impossibility of implementing them in  $CSP_{in}$ , even allowing additional helper processes like buffers. We have also mentioned that, while  $CSP_{in}$  is more commonly implemented, recent implementations of  $CSP_{i/o}$  do exist.

A way to circumvent this impossibility result is to remove some requirements. For example, we have provided a construction for non-symmetric systems in  $CSP_{in}$ . In general, if we give up the symmetry requirement,  $CSP_{i/o}$  can be implemented in  $CSP_{in}$  [3, p. 197].

Another way is to tweak the definition or the assumptions about common knowledge. Various possibilities are given in [10]. By following the eager protocol proposed there, common knowledge can eventually be attained, but the trade-off is an indefinite time span during which the knowledge states of the processes are inconsistent. This may not be an option, especially in systems which have to be able to act sensibly and rationally at any time. Alternatively, if messages are guaranteed to be delivered exactly after some fixed amount of time, common knowledge can also be achieved, but this may not be realistic in actual systems. Finally, possibilities to approximate common knowledge are described. Approximate common knowledge or finite mutual knowledge may suffice in settings where the impact decreases significantly as the depth of mutual knowledge increases, see e.g. [26].

However, if one is interested in symmetric systems and exact common knowledge, as in the game-theoretical settings described in Section 1.1, then our results show that  $CSP_{i/o}$  is a suitable formalism, while  $CSP_{in}$  is insufficient. Already in the introducing paper [11], the exclusion of output guards from *CSP* was recognized as reducing expressivity and being programmatically inconvenient, and soon it was deemed technically not justified [2, 4, 7] and removed in later versions of *CSP* [12, p. 227].

Some existing proposals for implementations of input and output guards and synchronous communication could be criticized for simply shifting the problems to a lower level, notably for not being symmetric themselves or for not even being strictly synchronous in real systems due to temporal imprecision [10].

However, it is often useful to abstract from implementation issues on the high level of a process calculus or a programming language (see e.g. [15, Section 10]). For these reasons, we favor an implementation of  $CSP_{i/o}$  over one of  $CSP_{in}$ .

## Acknowledgments

I would like to thank my supervisor Krzysztof Apt for his support, helpful comments and suggestions.

## References

- [1] Gregory R. Andrews. *Concurrent Programming: Principles and Practice*. Addison Wesley, July 1991.
- [2] Arthur Bernstein. Output guards and nondeterminism in “Communicating Sequential Processes”. *ACM Trans. Program. Lang. Syst.*, 2:234–238, 1980.
- [3] Luc Bougé. On the existence of symmetric algorithms to find leaders in networks of communicating sequential processes. *Acta Informatica*, 25:179–201, February 1988.
- [4] Gael N. Buckley and Abraham Silberschatz. An effective implementation for the generalized input-output construct of csp. *ACM Trans. Program. Lang. Syst.*, 5:223–235, 1983.
- [5] Ronald Fagin, Joseph Y. Halpern, Moshe Y. Vardi, and Yoram Moses. *Reasoning about knowledge*. MIT Press, 1995.
- [6] Faith Fich and Eric Ruppert. Hundreds of impossibility results for distributed computing. *Distributed Computing*, 16:121–163, 2003.
- [7] Robert E. Filman and Daniel P. Friedman. *Coordinated Computing: Tools and Techniques for Distributed Software*. McGraw-Hill, Inc, 1984.
- [8] Jim Gray. *Notes on Data Base Operating Systems*, volume 60 of *Lecture Notes in Computer Science*, pages 393–481. Springer-Verlag, 1978.
- [9] Joseph Y. Halpern. A computer scientist looks at game theory. *Games and Economic Behavior*, 45:114–131, October 2003.
- [10] Joseph Y. Halpern and Yoram Moses. Knowledge and common knowledge in a distributed environment. *Journal of the ACM*, 37:549–587, 1990.
- [11] C. Antony R. Hoare. Communicating sequential processes. *Commun. ACM*, 21:666–677, 1978.
- [12] C. Antony R. Hoare. *Communicating Sequential Processes*. Prentice-Hall, Inc, 1985.
- [13] INMOS Ltd. *occam 2 Reference Manual*. Prentice-Hall, 1988.
- [14] Geraint Jones. On guards. In Traian Muntean, editor, *Parallel Programming of Transputer Based Machines (OUG-7)*, pages 15–24, Amsterdam, 1988. IOS Press.

- [15] Reino Kurki-Suonio. Towards programming with knowledge expressions. In *13th ACM SIGACT-SIGPLAN symposium on Principles of programming languages (POPL)*, pages 140–149, St. Petersburg Beach, Florida, 1986. ACM Press.
- [16] Gérard Le Lann. Distributed systems, towards a formal approach. *Information Processing*, 77:155–160, 1977.
- [17] Stephen Morris. Coordination, communication, and common knowledge: A retrospective on the electronic-mail game. *Oxf Rev Econ Policy*, 18:433–445, December 2002.
- [18] Hervé Moulin. *Axioms of Cooperative Decision Making*. Cambridge University Press, 1988.
- [19] Martin J. Osborne. *An Introduction to Game Theory*. Oxford University Press, New York, August 2003.
- [20] Catuscia Palamidessi. Comparing the expressive power of the synchronous and asynchronous pi-calculi. *Mathematical Structures in Computer Science*, 13:685–719, 2003.
- [21] Rohit Parikh and Paul Krasucki. Communication, consensus, and knowledge. *Journal of Economic Theory*, 52:178–189, October 1990.
- [22] Gordon D. Plotkin. An operational semantics for csp. In Dines BjØrner, editor, *Formal Description of Programming Concepts – II: 3rd Working Conference*, pages 199–225, Amsterdam, 1983. North-Holland.
- [23] Ariel Rubinstein. The electronic mail game: Strategic behavior under "almost common knowledge". *The American Economic Review*, 79:385–391, June 1989.
- [24] Fred B. Schneider. Synchronization in distributed programs. *ACM Trans. Program. Lang. Syst*, 4:125–148, 1982.
- [25] Steve Schneider. *Concurrent and Real Time Systems: The CSP Approach*. John Wiley and Sons, Inc, 1999.
- [26] Jonathan Weinstein and Muhamet Yildiz. Impact of higher-order uncertainty. *Games and Economic Behavior*, 60:200–212, July 2007.
- [27] Peter Welch. An occam-pi Quick Reference, 1996–2007.  
<https://www.cs.kent.ac.uk/research/groups/sys/wiki/OccamPiReference>.
- [28] Peter Welch, Neil Brown, James Moores, Kevin Chalmers, and Bernhard Sputh. Integrating and extending JCSP. In Alistair A. McEwan, Steve Schneider, Wilson Ifill, and Peter Welch, editors, *Communicating Process Architectures*. IOS Press, 2007.